


STATE OF KANSAS  
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
P. O. Box 17027  
Wichita, Kansas 67217  
NORTH

WELL PLUGGING RECORD

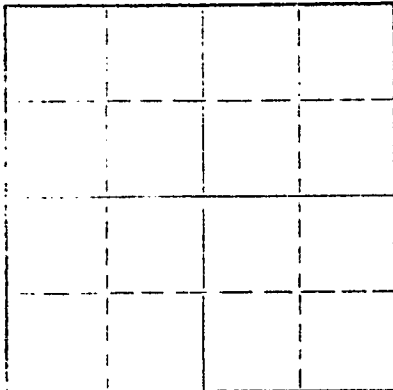

Locate well correctly on above  
Section Plat

Rooks \_\_\_\_\_ County Sec. 17 Twp. 10S Rge. (E) 18 (W)  
Location as "NE/CNW/SE/SW" or footage from lines S/2 NE NE  
Lease Owner Davis Bros.  
Lease Name Ordway A Well No. 2  
Office Address 500 McFarlin Building, Tulsa, OK 74103  
Character of Well (completed as Oil, Gas or Dry Hole) SWD  
Date well completed November 23 1960  
Application for plugging filed August 17 1972  
Application for plugging approved August 18 1972  
Plugging commenced September 12 1972  
Plugging completed September 12 1972  
Reason for abandonment of well or producing formation Well had been temporarily abandoned  
If a producing well is abandoned, date of last production SWD 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Leo Massey  
Producing formation None Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 3,757 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	190'	None
				4 1/2"	3,755'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Hole junked with 2 3/8" tbg. from 860' to 1,600' with pkr @ 1,600' - no tbg. recovered.

Ran tbg. to 860' - circulated 40 sacks cement to surface - pumped 10 sacks down annulus of 8 5/8" - 4 1/2" - pulled out tbg. - cur off below plow depth. Placed 6 1/2 sacks cement to cap. Work by Halliburton Services. Supervised by Charles G. Arnold, Davis Bros.

RECEIVED  
STATE CORPORATION COMMISSION  
10-18-72  
OCT 18 1972  
CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Halliburton Services  
Address Hays, Kansas

STATE OF Oklahoma COUNTY OF Tulsa, ss.  
Joseph J. Lawnick (Attorney at Law) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature)

Joseph J. Lawnick

500 McFarlin Building, Tulsa, OK 74103  
(Address)

SUBSCRIBED AND SWORN to before me this 16th day of October, 1972

My commission expires June 27, 1976

Carol J. Compton  
Carol J. Compton

Notary Public.

15-163-01865-0000  
15-163-01865-0000

WELL LOG

Davis Bros.  
Ordway "A" Well No. 2  
C S/2 NE NE Sec. 17-10S-18W  
Rooks County, Kansas

Elevation	2185	R. B.
Anhydrite	1580	
Topeka	3162	
Heebner	3375	
Toronto	3400	
Lansing KC	3420	
Base KC	3648	
Conglomerate	3659	
Simpson	3681	
Arbuckle	3751	
TD	3757	