


WELL PLUGGING RECORD

STATE OF KANSAS STATE CORPORATION COMMISSION

Give All Information Completely Make Required Affidavit Mail or Deliver Report to: Conservation Division State Corporation Commission 800 Bitting Building Wichita, Kansas

FORMATION PLUGGING RECORD

Strike out upper line when reporting plugging off formations.

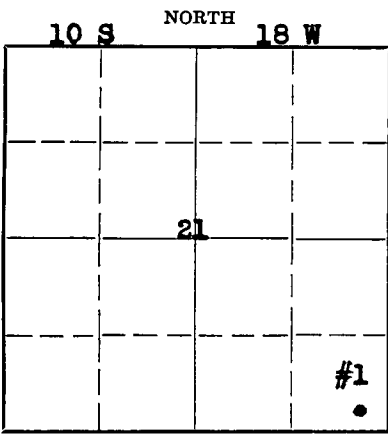

Rocks _____ County. Sec. 21 Twp. 10 S Rge. (E) 18 (W) Location as "NE 1/4 NW 1/4 SW 1/4" or footage from lines SE-SE-SE Lease Owner Helmerich & Payne Inc. Lease Name Ordway Well No. 1 Office Address 415 Philtower Tulsa, Oklahoma Character of Well (completed as Oil, Gas or Dry Hole) Dry Date well completed 11-22-44 Application for plugging filed 11-21-44 Application for plugging approved 11-21-44 Plugging commenced 11-21-44 Plugging completed 11-21-44 Reason for abandonment of well or producing formation Dry If a producing well is abandoned, date of last production 19 Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well _____ Producing formation None Depth to top _____ Bottom _____ Total Depth of Well 3784 Feet Show depth and thickness of all water, oil and gas formations.


OIL, GAS OR WATER RECORDS

CASING RECORD

Table with 7 columns: Formation, Content, From, To, Size, Put In, Pulled Out. Row 1: Formation (blank), Content (blank), From (blank), To (blank), Size 10 3/4, Put In 160', Pulled Out None.

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Heavy muc circulated form 3784' to 160'. Bridge set at 160', 15 sacks cement pumped in hole filling to 130'. Heavy mud from 130' to 20'. 10 sacks cement from 20' to bottom of cellar.



(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to Helmerich & Payne Inc. Address 415 Philtower Tulsa, Okla.

STATE OF Oklahoma, COUNTY OF Tulsa, ss. Harry Saye (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Harry Saye Prod. Supt. 415 Philtower Tulsa, Okla. (Address)

SUBSCRIBED AND SWORN to before me this 5th day of December 1944

My commission expires 7/22/47 Notary Public. [Signature]

Ordway #1
SE/4 SE/4 SE/4 Section 21-10S-18W
Rooks County, Kansas
Helmerich & Payne, Inc.

Commenced: November 4, 1944
 Completed: November 22, 1944

Surface clay	0	40
Rock and shale	40	100
Sand	100	135
Shale and shells	135	575
Sand	575	615
Shale and shells	615	700
Sand	700	730
Shale and shells	730	770
Sandy shale	770	880
Shale and shells	880	940
Sand	940	1120
Shale	1120	1150
Shale and shells	1150	1216
Sandy shale	1216	1450
Red bed	1450	1465
Lime	1465	1515
Shale and shells	1515	1585
Shale	1585	1638
Shale and shells	1638	2045
Shale	2045	2118
Lime and shale	2118	2210
Shale and shells	2210	2320
Cherty lime	2320	2345
Lime and shale, cherty	2345	2355
Topeka Lime	2355	2390
Lime and shale	2390	2470
Shale and shells	2470	2540
Sand	2540	2554
Shale and shells	2554	2570
Lime and shale	2570	2586
Sand	2586	2594
Shale	2594	2606
Shale and lime	2606	2793
Shale, sand	2793	2893
Lime and shale	2893	2926
Sandy shale	2926	2974
Shale and lime	2974	3010
Soft lime	3010	3025
Shale and lime	3025	3109
Shale	3109	3128
Soft lime	3128	3136
Shale and lime	3136	3450
Soft lime	3450	3475
Lime and shale	3475	3673
Conglomerate	3673	3691
Shale	3691	3770
Lime	3770	3784
TOTAL DEPTH	3784	

CASING RECORD

10 3/4" casing set at 150' and cemented
 with 125 sacks cement

21 10 18W
 141 6

STATE OF OKLAHOMA)
 COUNTY OF TULSA ss

I hereby affirm that the above and foregoing is a true and correct copy of the log of our Ordway #1 Well, located in the Southeast quarter of the Southeast Quarter of the Southeast Quarter of Section 21, Township 10 South, Range 18 West, Rooks County, Kansas.

HELMERICH & PAYNE, INC.

William B. ...
 Treasurer

Subscribed and sworn to before me, a Notary Public, this 22th day of November, 1944.

Gene Griffie
 Notary Public

My commission expires July 22, 1947.