

15-163-02661-0000


STATE OF KANSAS
CORPORATION COMMISSION

WELL PLUGGING RECORD

Give Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

Rooks County. Sec. 24 Twp. 10 Rge. 18 (E) W (W)
Location as "NE/CNW/SW" or footage from lines C - NE - SE
Lease Owner Davis Bros.
Lease Name Yohe Well No. C 2
Office Address Tulsa Oklahoma
Character of Well (completed as Oil, Gas or Dry Hole) _____
Date well completed _____ 19____
Application for plugging filed _____ 19____
Application for plugging approved _____ 19____
Plugging commenced May 10 1962
Plugging completed May 31 1962
Reason for abandonment of well or producing formation _____

NORTH

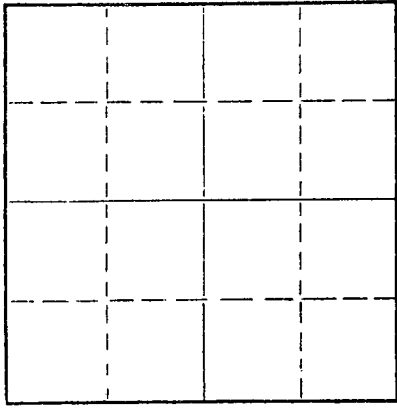

Locate well correctly on above
Section Flat

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Eldon Petty
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3647 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from 3647 feet to surface feet for each plug set.

Well had been plugged back from 3647 to 3633, Top perforations was 335I. Hole filled with sand from 335I to 3340, and four sacks of cement placed on top of sand with bailer. Pipe shot off at 216I and pulled up to 550 feet, Circulated with mud, and 20 sacks of cement pumped to 550 feet. Pipe then pulled to 180 feet, pump 20 sacks of cement to 180 feet, Pulled pipe from hole 10 sacks of cement put on top. Plugging complete.

RECEIVED
STATE CORPORATION COMMISSION
6-7-62
JUN 7 1962
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Barnes & Sons Pipe Pulling Co.
Address Russell, Kansas

STATE OF Oklahoma, COUNTY OF Tulsa, ss.
Richard E. Price (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Richard E. Price

(Address) June, 1962
Betty Combs Notary Public.

SUBSCRIBED AND SWORN to before me this 6th day of June, 1962
My commission expires My Commission Expires Feb. 28, 1965



15463-02661-0000

YOHE "C" WELL NO. 2

C NE SE - Section 24-T10S-R18W
Rooks County, Kansas

RECEIVED
STATE CORPORATION COMMISSION

JUN 21 1962

CONSERVATION DIVISION
Wichita, Kansas

WELL LOG - (Abandoned Well)

Topeka	3105' (- 965)
Heebner	3333' (-1193)
Toronto	3352' (-1212)
Lansing	3374' (-1234)
Base of K.C.	3606' (-1466)
Conglomerate	3635' (-1495)
TD	3647' (-1507)

By *Ralph A. Hockenson*
Ralph A. Hockenson
Manager of Production

DAVIS BROS.
510 McFarlin Building
Tulsa, Oklahoma