


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Rooks County, Sec. 30 Twp. 10S Rge. 18W E/W
Location as "NE/CNW $\frac{1}{2}$ SW $\frac{1}{2}$ " or footage from lines
C SE NE

Lease Owner Tomlinson Oil Company
Lease Name DAUWE Well No. 1
Office Address 200 W. Douglas, Suite 1030, Wichita KS
Character of Well (Completed as Oil, Gas or Dry Hole)
Dry Hole

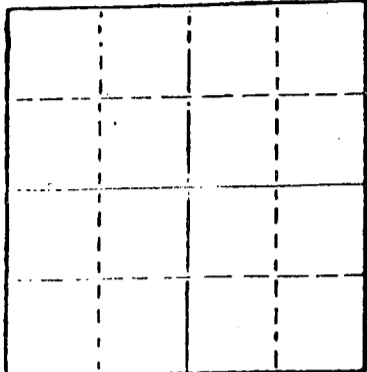

Locate well correctly on above
Section Plot

Date Well completed Oct. 10 1979
Application for plugging filed (verbally) Oct. 10 1979
Application for plugging approved (verbally) Oct. 10 1979
Plugging commenced Oct. 10 1979
Plugging completed Oct. 10 1979

Reason for abandonment of well or producing formation
No commercial quantity of oil or gas encountered
If a producing well is abandoned, date of last production
19

Was permission obtained from the Conservation Division or
its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Marion Schmidt
Producing formation Depth to top Bottom Total Depth of Well 3680'
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

T.D. 3680'
Set 1st plug at 690' with 70 sacks
2nd plug at 210' with 20 sacks
3rd plug at 40' solid bridge with 10 sacks
rathole with 5 sacks.

Cemented with 50/50 posmix, 6% gel.
Plug was down at 7:30 p.m., 10-10-79

10-23-79

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Abercrombie Drilling, Inc.

STATE OF Kansas COUNTY OF Sedgwick, ss.
Jack L. Partridge, Asst. Sec.-Treas. (employee of owner) or (owner or operator)
of the above-described well, being first duly sworn on oath, says: That I have knowledge of
the facts, statements, and matters herein contained and the log of the above-described well
as filed and that the same are true and correct. So help me God.

(Signature) Jack L. Partridge
801 Union Center, Wichita, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 22nd day of October, 1979



Sherrie L. Brooks
Sherrie L. Brooks Notary Public.

My commission expires 08-21-82

CONTRACTOR'S WELL LOG

OPERATOR: Tomlinson Oil Company
 CONTRACTOR: Abercrombie Drilling, Inc.
 WELL NAME: Dauwe #1
 LOCATION: C SE NE, Section 30-10S-18W
 Rooks County, Kansas
 SPUD DATE: October 03, 1979
 COMPLETION DATE: October 10, 1979

0	72	Post rock and sand
72	220	Shale and sand
220	1427	Sand and shale
1427	1459	Anhydrite
1459	2006	Shale and red bed
2006	2769	Shale and lime
2769	3206	Lime and shale
3206	3346	Shale and lime
3346	3385	Lime and shale
3385	3590	Lime
3590	3680	Shale and lime
	3680	Rotary Total Depth

Spud hole at 1:30 p.m., October 03, 1979. Drilled 220' of 12 1/4" hole. Ran 5 joints of 8-5/8" - 24# casing. Set at 216.80' with 135 sacks of common cement, 3% Ca.Cl., 2% gel. Cement did circulate. Job was complete at 6:30 p.m., October 03, 1979.

T.D. 3680'. Set 1st plug at 690' with 70 sacks, 2nd plug at 210' with 20 sacks, 3rd plug at 40' solid bridge with 10 sacks, rathole with 5 sacks. Cemented with 50/50 posmix, 6% gel. Plug was down at 7:30 p.m., October 10, 1979.

SAMPLE TOPS:

Anhydrite 1427'
 B/Anhydrite 1459'

OCT 20 1979

STATE OF KANSAS)
) ss
 COUNTY OF SEDGWICK)

Jack L. Partridge, Assistant Secretary-Treasurer of Abercrombie Drilling, Inc., does hereby state that the above and foregoing is a true and correct copy of the log of the DAUWE #1, C SE NE, Section 30-10S-18W, Rooks County, Kansas.

ABERCROMBIE DRILLING, INC.

BY Jack L. Partridge
 Jack L. Partridge
 Assistant Secretary-Treasurer

Subscribed and sworn to before me, a Notary Public, in and for the county and state aforesaid, as of this 22nd day of October, 1979.



Sherrie L. Brooks
 Sherrie Brooks, Notary Public

My commission expires 08-21-82.