

Notice: Fill out COMPLETELY and return to Conservation Division at the address below within 60 days from plugging date.

KANSAS CORPORATION COMMISSION
OIL & GAS CONSERVATION DIVISION
WELL PLUGGING RECORD
K.A.R. 82-3-117

Form CP-4
December 2003
Type or Print on this Form
Form must be Signed
All blanks must be Filled

Lease Operator: Te-Pe Oil & Gas
Address: P.O. Box 522, Canton, KS 67428
Phone: (620) 628-4428 Operator License #: 5920
Type of Well: Oil Docket #: _____
(Oil, Gas D&A, SWD, ENHR, Water Supply Well, Cathodic, Other) (If SWD or ENHR)
The plugging proposal was approved on: _____ (Date)
by: Jeff Klock (KCC District Agent's Name)
Is ACO-1 filed? Yes No If not, is well log attached? Yes No
Producing Formation(s): List All (If needed attach another sheet)
Arbuckle Depth to Top: 3373 Bottom: 3385 T.D. 3385

Depth to Top: _____ Bottom: _____ T.D. _____

API Number: 15-009-21297-00-00
Lease Name: Seyfert
Well Number: #3
Spot Location (QQQQ): _____ - E2 - SW - NE
1,980 Feet from North / South Section Line
1,650 Feet from East / West Section Line
Sec. 3 Twp. 17 S. R. 13 East West
County: Barton
Date Well Completed: _____
Plugging Commenced: 06/24/09
Plugging Completed: 06/26/09

Show depth and thickness of all water, oil and gas formations.

| Oil, Gas or Water Records | | Casing Record (Surface Conductor & Production) | | | | |
|---------------------------|-------------|--|----|--------|--------|------------|
| Formation | Content | From | To | Size | Put In | Pulled Out |
| Arbuckle | Water & Oil | | | | | |
| | | | | 8 5/8" | 286' | o |
| | | | | 5 1/2" | 3,380' | o |

Describe in detail the manner in which the well is plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same depth placed from (bottom), to (top) for each plug set.

Sand was at 3,220' and 5 sacks cement. Shot holes at 1,500', 830', and 425'. Ran tubing to 1,500'. Pumped 3 hulls, 100 sacks. Pulled to 830'; Pumped 100 sacks 2 hulls; Pulled to 425'; Pumped 50 sacks to surface. Pulled tubing out; Hooked up to 5 1/2" casing; Pumped 40 sacks. Max PSI 200; Shot in 100 PSI. Hooked up top 8 5/8"; Pumped 10 sacks. PSI 550. Cut surface off 4' below ground

KANSAS CORPORATION COMMISSION

Name of Plugging Contractor: Quality Well Service, Inc. License #: 31925 **JUL 10 2009**

Address: 190 US 56 Hwy., Ellinwood, KS 67526 **RECEIVED**

Name of Party Responsible for Plugging Fees: Te-Pe Oil & Gas

State of Kansas County, McPherson, ss.

Terry Bandy (Notary Public) or (Operator) on above-described well, being first duly sworn on oath, says that I have knowledge of the facts statements, and matters herein contained, and the log of the above-described well is as filed, and the same are true and correct help me God


(Signature) Terry Bandy

(Address) P.O. Box 522, Canton, Kansas 67428

SUBSCRIBED and SWORN TO before me this 9th day of July, 2009

Cynthia G. Beneke My Commission Expires: May 15, 2010
Notary Public

Mail to: KCC - Conservation Division, 130 S. Market - Room 2078, Wichita, Kansas 67202

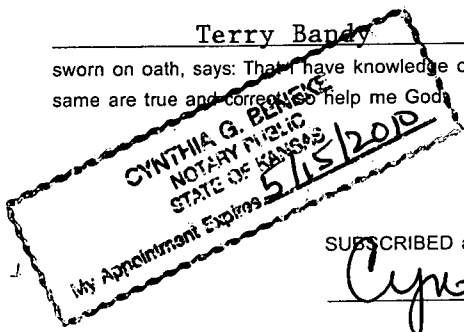

RT