


15-163-21884-0000

STATE OF KANSAS  
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to  
Conservation Division  
State Corporation Comm.  
245 North Water  
Wichita, KS 67202

Rooks County, Sec. 3 Twp. 10 Rge. 19 <sup>1</sup>/<sub>4</sub> W  
Location as "NE/CNW<sup>1</sup>/<sub>4</sub>SW<sup>1</sup>/<sub>4</sub>" or footage from lines  
1650' from SL, 1650' from EL  
Lease Owner Dreiling Ltd. of Colorado  
Lease Name Sutor Well No. 1  
Office Address 410 - 17th St., Suite 1140, Denver, Co. 80202  
Character of Well (Completed as Oil, Gas or Dry Hole)  
Dry Hole

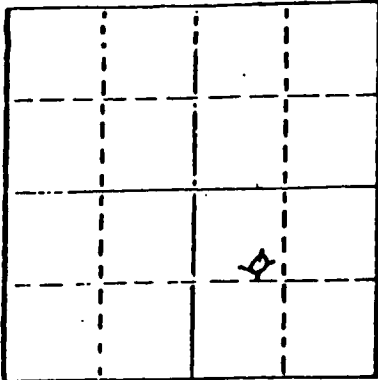

Locate well correctly on above  
Section Plot

Date Well completed 11-30 19 82  
Application for plugging filed 12-7 19 82  
Application for plugging approved 11-29 19 82  
Plugging commenced 11:50 PM 11-29 19 82  
Plugging completed 3:20 AM 11-30 19 82  
Reason for abandonment of well or producing formation  
Non-productive  
If a producing well is abandoned, date of last production  
None 19

Was permission obtained from the Conservation Division or  
its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Carl Goodrow  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 3672  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8	210	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid  
was placed and the method or methods used in introducing it into the hold. If cement or other  
plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to  
\_\_\_\_\_ feet for each plug set. Hole full of heavy mud. Pumped cement through  
drill pipe as follows:

- 1st cement plug at 1520' with 20 sacks
- 2nd cement plug at 910' with 100 sacks
- 3rd cement plug at 225' with 40 sacks
- 4th wood and rubber plug with hulls at 40' with 10 sacks
- 10 sacks in rathole
- 10 sacks in mousehole
- 190 sacks total 50/50 pozmix with 6% gel, 3% cc

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Halliburton

STATE OF Colorado COUNTY OF Denver, ss.  
Leslie Olson (employee of owner) or ~~(owner or operator)~~

of the above-described well, being first duly sworn on oath, says: That I have knowledge of  
the facts, statements, and matters herein contained and the log of the above-described well  
as filed and that the same are true and correct. So help me God.

(Signature) Leslie Olson  
410 - 17th St., Suite 1140, Denver, Co. 80202  
(Address)

SUBSCRIBED AND SWORN TO before me this 8th day of December, 1982

Lorraine C. Murphy  
Notary Public.

My commission expires 9-2-83

STATE CORPORATION COMMISSION  
12-13-82  
DEC 13 1982  
Wichita, Kansas