


15-163-02588-0000

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Biting Building
Wichita, Kansas

Rooks County, Sec. 5 Twp. 10S Rge. 19W (E) (W)
Location as "NE/CNW/SW" or footage from lines NW SE SE
Lease Owner L. B. Stableford
Lease Name Sutor Well No. 2
Office Address 1005 Central Bldg., Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry hole
Date well completed 10-24 19 52
Application for plugging filed 10-24 19 52
Application for plugging approved 10-24 19 52
Plugging commenced 8:00 a.m., 10-24 19 52
Plugging completed 4:00 p.m., 10-24 19 52
Reason for abandonment of well or producing formation Commercial quantity of oil not found

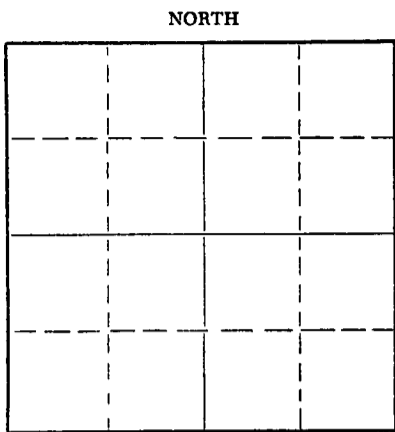

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Eldon Petty
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3787 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"		None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Filled hole with heavy mud to 180'. Bridge and 15 sacks cement. Fill to 40', plug half sack of hulls and 10 sacks cement.

10-29-52

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Deek Drilling, Inc.
Address 1006 Central Bldg., Wichita, Kansas


STATE OF Kansas, COUNTY OF Sedgwick, ss.
Clinton Engstrand, agent for (employee of owner) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Clinton Engstrand
1006 Central Bldg., Wichita, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 27 day of October, 19 52

W. J. [Signature]
Notary Public.

My commission expires 10-29-55



L. B. STABLEFORD
SUTOR NO. 2

NW SE SE Sec. 5-10S-19W
Reeks County, Kansas

Comm: 10-11-52
Comp: 10-24-52
Total Depth: 3787'

Casing
8 5/8" Set @ 190'

Cement
125 Sacks

<u>FORMATION</u>	<u>DEPTH</u>
Sand and shale	0 - 175
Blue shale	175 - 190
Blue shale	190 - 395
Shale and shells and sand	395 - 1055
Shale and shells and sand	1055 - 1550
Red bed	1550 - 1627
Anhydrite	1627 - 1645
Shale and lime shells	1645 - 1975
Shale and shells	1975 - 2154
Lime shells and shale	2154 - 2305
Lime and shale	2305 - 3195
Lime	3195 - 3741
Shale and chert	3741 - 3787

STATE OF KANSAS)
SEDGWICK COUNTY) SS

I hereby certify that the above information is true and correct to the best of my knowledge.



Subscribed and sworn to before me this 28th day of October, 1952


Notary Public

My Commission Expires: 10-29-55

PLUGGING
PLK SEC 5 T 10 R 19W
BOOK PAGE 55 LINE 9

PLUGGING
PLK SEC 5 T 10 R 19W
BOOK PAGE 55 LINE 9