


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

ROOKS County. Sec. 19 Twp. 10S Rge. 19 E/W
Location as "NE/CNW $\frac{1}{2}$ /SW $\frac{1}{2}$ " or footage from lines NW $\frac{1}{2}$ /NW $\frac{1}{2}$ /NW

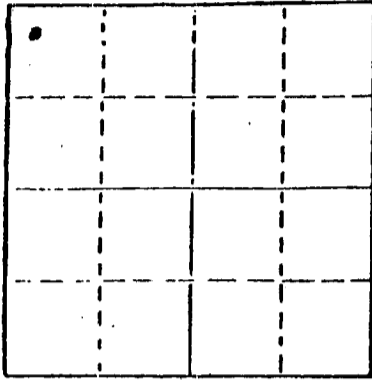

Lease Owner WORDEN PETROLEUM COMPANY
Lease Name HENRY BERLAND Well No. 1-15
Office Address P.O. Box No. 996, Hays, Kansas 67601
Character of Well (Completed as Oil, Gas or Dry Hole) Oil
Drilled by TEXACO IN 1949, Known as their "15-A"
Date Well completed _____ 19____
Application for plugging filed 9/17/1979- 5/6/1980 19____
Application for plugging approved 9/19/1980 19____
Plugging commenced 9/24/1980 19____
Plugging completed 9/24/1980 19____
Reason for abandonment of well or producing formation
Henry Berland forced WORDEN to stop at 3746' and
~~XX~~
FORFEIT ALL RIGHTS TO PROCEED ANY FURTHER. 19____

Was permission obtained from the Conservation Division or its agents before plugging was commenced? YES
Name of Conservation Agent who supervised plugging of this well MR. MARION SCHMIDT
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3766'
Show depth and thickness of all water, oil and gas formations. 4

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	1618'	NONE
Plugging ROCKHOLD pulled this casing in		11/8/1972		5-1/2"	3761'	2809.11'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Found re-opened ^{WELL} bottom to be 3746 feet.

HALLIBURTON furnished all equipment and materials for this job 9/24/1980.
Pumped down 8-5/8" casing 140 sacks 50/50 Posmix W. 6% Jel, 18 sacks jel & 3 sacks Hulls, under a maximum pressure of 500lbs. Completed 8:25 P.M. 9/24/1980

9/25/1980 Checked job & found cement had settled 4'
9/26/1980 Worden filled this 4' to top of 8-5/8" casing W. Readi-Mix Concrete.

NOTE: Worden Pet. DID NOT abandon this well, nor the LEASE, but was forced to quit.
(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor WORDEN PETROLEUM COMPANY


STATE OF KANSAS COUNTY OF ELLIS, ss.
G. W. BENNETT (employee of owner) or (owner or operator)

of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) [Signature]
(Address) _____

SUBSCRIBED AND SWORN TO before me this 29th day of SEPTEMBER, 19 80

My commission expires Nov. 22, 1980



RECEIVED
STATE CORPORATION COMMISSION
9-30-80
SEP 30 1980
CONSERVATION DIVISION
Wichita, Kansas