


STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bittling Building
Wichita, Kansas

WELL PLUGGING RECORD

NORTH

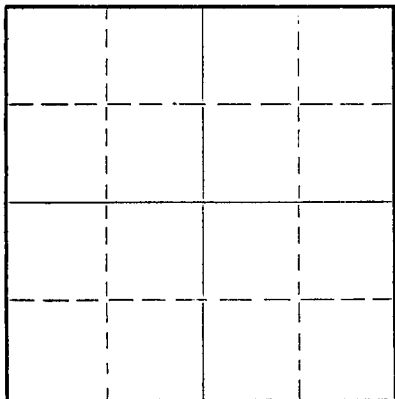

Locate well correctly on above
Section Plat

Rooks County. Sec. 19 Twp. 10S Rge. 19 (E) (W)
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines SE NW NW NW NW SE
Lease Owner PETROLEUM, INC.
Lease Name Berland Well No. 1
Office Address 100 Derby Bldg., Wichita 2, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Oil Well then Dry Hole
Date well completed 3-5 19 49
Application for plugging filed 7-23 19 49
Application for plugging approved 7-14 19 49
Plugging commenced 7-5 19 49
Plugging completed 7-16 19 49
Reason for abandonment of well or producing formation Abandoned Well

If a producing well is abandoned, date of last production May 19 49
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well C. D. Stough, Box 207, Great Bend, Ks.
Producing formation Depth to top Bottom Total Depth of Well 3813 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
				206'	8 5/8"	None
				3806'	5 1/2"	3270'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Dumped 6 sacks of cement above top of perforation. Put 15 sacks
of cement at 250' - Placed plug at 250' -
Mixed 15 sax cement and pumped on top of plug
Finished mudding hole and put 5 sacks of cement
at top of surface.

7-25-49

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to PETROLEUM, INC.
Address 100 Derby Bldg.
Wichita, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.
Eric H. Jager (employee of owner) or (owner or operator) of the above-described well,
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.


(Signature) Eric H. Jager
100 Derby Building, Wichita 2, Kans.
(Address)

SUBSCRIBED AND SWORN to before me this 23 day of July, 19 49

My commission expires June 7, 1952.

22-5133-s 9-48-10M

Notary Public.



15-163-02576-0000
WELL LOG BERLAND NO. 1

Petroleum, Inc.

Total Depth: 3813 - Rotary

Commenced: 2-19-49

Completed: 3-10-49

Casing: 206' of 8 5/8"

Sec. 19, Twp. 10 Range 19W

Location: NW NW SE
SE NW NW

County: Rooks, Kansas

Elevation:

Production:

Figures below indicate bottom of formation.

60	Sand	2805	Lime & Shale
190	Shale	2880	Lime & Shale
197	Lime	3205	Lime & Shale
470	Shale	3280	Lime
820	Shale & Shells	3335	Lime & Shale
850	Sand	3586	Lime
945	Shale - sandy	3623	Lime & Shale
1290	Sand	3687	Lime
1550	Red Rock & Shale	3755	Lime & shale
1600	Red Bed	3783	Lime
1645	Anhydrite	3796	Shale & Dolomite
2020	Shale & Shells	3811	Shale
2160	Shale & Red Rock	3813	Lime
2214	Lime	3813	Total Depth
2350	Shale		
2510	Lime & Shale		
2580	Lime		


I hereby certify that this is a true and correct log of the above mentioned well.

PETROLEUM, INC.

Eric H. Jager
Eric H. Jager

STATE OF KANSAS
: SS
SEDGWICK COUNTY

Subscribed and sworn to before me, a Notary Public in said County and State this 11th day of July, 1949.

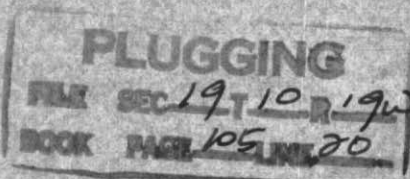

Notary Public

My Commission Expires: June 7, 1952.