

REC'D APR 8 1964

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

Rooks County. Sec. 20 Twp. 10 Rge. 19 (E) W (W)

Location as "NE/CNW/SW" or footage from lines NE SW NE

Lease Owner Clinton Oil Company

Lease Name Berland Well No. 1

Office Address Wichita, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) _____

Date well completed _____ 19____

Application for plugging filed _____ 19____

Application for plugging approved _____ 19____


Plugging commenced 3-18-64 _____ 19____

Plugging completed 3-25-64 _____ 19____

Reason for abandonment of well or producing formation Depleted.

If a producing well is abandoned, date of last production _____ 19____

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

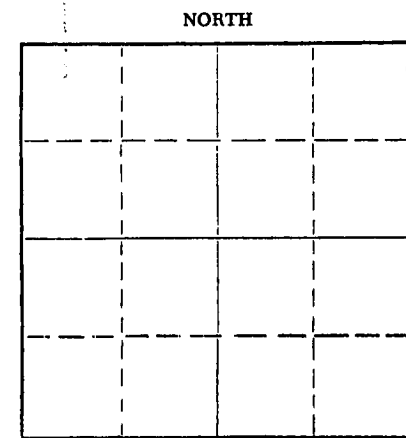

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Eldon Petty

Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3816 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUL IN	PULLED OUT
				8-5/8"	181'	None
				5-1/2"	3815'	2528'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Checked hole to plug back @ 3779', sanded hole to 3750' and dumped 4 sacks of cement @ 3750' with dump bailer. Pulled 5 1/2" casing to 550', circulated with 18 sacks of gel mud and pumped in 20 sacks of cement @ 550'. Pulled 5 1/2" casing to 200' and pumped in 20 sacks of cement. Pulled balance of 5 1/2" casing, checked fluid to 100', mudded hole to 30' and ran 10 sacks of cement to base of cellar.

RECEIVED
STATE CORPORATION COMMISSION

4-15-64
APR 15 1964

PLUGGING COMPLETE.

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor KNIGHT CASING PULLING COMPANY

Address CHASE, KANSAS

STATE OF KANSAS, COUNTY OF RICE, ss.

Noel J. Knight (employee of owner) or (~~owner~~) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Noel J. Knight

Chase, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 7th day of April, 1964

Milton J. Volin
Notary Public.

My commission expires May 20, 1964

DRILLER'S LOG

Company: Jones-Gebert Oil, Inc. & Clinton Oil Company
 Contractor: Jones-Gebert Oil, Inc.
 Farm: #1 Berland, NE SW NE Section 20-108-19W Rooks County, Kansas
 Commenced: 2/16/64
 Completed: 3/2/64
 Casing: 8-5/8" at 181' with 110 ex.
 5-1/2" at 3815' with 60 ex.

0	-	42	Surface soil
42	-	90	Sand
90	-	140	Sand & Shale
140	-	1565	Shale
1565	-	1590	Anhydrite
1590	-	1855	Shale & Lime
1855	-	2305	Shale
2305	-	3405	Shale & Lime
3405	-	3462	Lime with Chert & Shale
3462	-	3614	Lime
3614	-	3675	Shale with Lime
3675	-	3709	Lime
3709	-	3761	Shale, Lime & Chert
3761	-	3767	Arbuckle - Dolomite
3767	-	3825	Arbuckle - Dolomite
		3825	Rotary Total Depth

RECEIVED
 STATE CORPORATION COMMISSION
 MAR 12 1964
 CONSERVATION DIVISION
 Wichita, Kansas

I, George R. Jones, do hereby certify that the above and foregoing is a true and correct copy of the log of the #1 Berland, NE SW NE, Section 20-108-19W, Rooks County, Kansas, as reflected by the files of Jones-Gebert Oil, Inc.

George R. Jones
 GEORGE R. JONES

State of Kansas, County of Sedgwick) ss:

Subscribed and sworn to before me, a Notary Public, in and for Sedgwick County, Kansas, this 5th day of March, 1964.

My Commission Expires:
 January 8, 1968

Lois J. McCoy
 Lois J. McCoy, Notary Public