

STATE OF KANSAS
STATE CORPORATION COMMISSION


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission

P. O. Box 17027
Wichita, Kansas 67217
NORTH

WELL PLUGGING RECORD

Rooks County, Sec. 21 Twp. 10 Rge. 19 (E) W (W)

Location as "NE/CNW/SW" or footage from lines NW SW SE
Lease Owner Shields Oil Producers, Inc.
Lease Name Dick Well No. 1
Office Address Shields Bldg., Russell, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry hole
Date well completed 7-26 1974
Application for plugging filed 7-26 1974
Application for plugging approved 7-26 1974
Plugging commenced 7-26 1974
Plugging completed 7-26 1974
Reason for abandonment of well or producing formation Dry hole

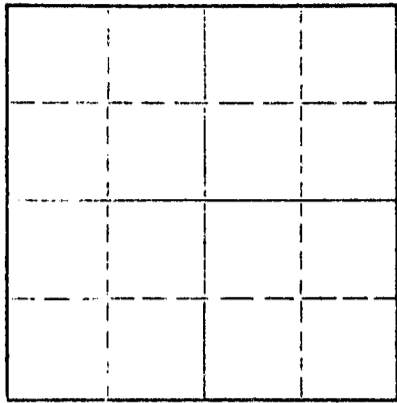

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Leo Massey
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3,750 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	201'	Cmtd. w/140 sax

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Fill hole w/heavy mud
Push Bridge plug to 660'
Spotted 70 sax cement on plug thru 4 1/2" drill pipe
Fill hole w/heavy mud
Push bridge plug to 185'
Spotted 20 sax cement on plug thru 4 1/2" drill pipe
Push bridge plug to 40' w/1/2 sax hulls on plug
Dump 10 sax cement on plug to cellar

RECEIVED
STATE CORPORATION COMMISSION
8-21-74
1974
CONSERVATION DIVISION

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Shields Drilling Co., Inc.
Address Shields Bldg., Russell, Kansas 67665

STATE OF KANSAS, COUNTY OF RUSSELL, ss.
R. L. Shields (~~employee of owner~~) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) R. L. Shields, Pres.
Shields Bldg., Russell, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 20th day of August, 1974

My commission expires May 26, 1975
Russ Phillips
Notary Public.



Shields

15-163-20527-0000


Russell, Kansas

WELL LOG

Operator: Shields Oil Producers, Inc.
 Well: Dick #1
 Commenced: July 15, 1974
 Completed: July 26, 1974
 Contractor: Shields Drilling Co., Inc.

Well Description:

NW SW SE
 Sec. 21-10S-19W
 Rooks County, Kansas



CASING RECORD

Size	Run	Pulled
8 5/8"	201'	Cmtd. w/140 sax

Elevation:

Treatment:

Production:

Tops:

..... Figures Indicate Bottom of Formations

Sand & shale	210'
Shale	1,165'
Redbed, shale & shells	1,528'
Anhydrite	1,558'
Shale & shells	2,005'
Shale	2,175'
Shale & lime	3,302'
Lime	3,655'
Conglomerate	3,705'
Lime	3,750' RTD

RECEIVED
 STATE CORPORATION COMMISSION
 AUG 21 1974
 CONSERVATION DIVISION
 Wichita, Kansas

Notes