

15-163-04071-0000

STATE OF KANSAS  
STATE CORPORATION COMMISSION


WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
800 Biting Building  
Wichita, Kansas

Rooks County, Sec. 30 Twp. 10 Rge. 19 (E)W (W)

Location as "NE/CNW/SW" or footage from lines SW/4 SW/4 SE/4  
Lease Owner Birmingham and Bartlett Drilling Co.  
Lease Name Birmingham & Bartlett Keller Well No. 2.  
Office Address 300 Kaufman Bldg., Wichita, Kansas.  
Character of Well (completed as Oil, Gas or Dry Hole) Oil Well  
Date well completed February 3 19 51  
Application for plugging filed April 13 19 53  
Application for plugging approved April 17 19 53  
Plugging commenced May 1 19 53  
Plugging completed May 12 19 53  
Reason for abandonment of well or producing formation Depletion of oil production down to non-commercial status.  
If a producing well is abandoned, date of last production April 7 19 53.  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

NORTH

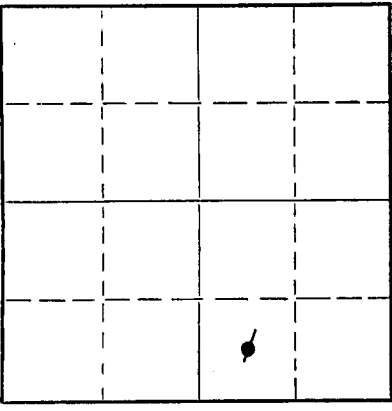

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Eldon Petty,  
Producing formation Lansing-Kansas City Depth to top 3465' Bottom 3675' Total Depth of Well 3801 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
		0'	192'	8-5/8"	195'	None
		0'	3785'	5--1/2"	3790.62'	2876.4'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from 3801 feet to surface 0 feet for each plug set.

Lane Well bridging plug set at 3527; hole filled with sand from 3527 to 3480; four sacks of cement placed with dump bailer to form cement plug from 3480 to 3448 ft; Hole filled with mud from 3448 to 190 ft; ten foot rock bridge installed from 190 to 180; fifteen sacks of cement placed with dump bailer to form cement plug from 180 to 130; hole filled with mud from 130 feet to 30 feet; hole capped with rock bridge from 30 ft to 25 feet with ten sacks of cement placed on top of bridge. Plugging complete.

RECEIVED  
MAY 26 1953  
CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Barnes and Sons Pipe Pulling Company  
Address Russell, Kansas

STATE OF KANSAS COUNTY OF SEDGWICK SS. Chas. H. Keever Prod. Supt. of Birmingham-Bartlett Drlg. Co. part owner & opt. well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Chas. H. Keever  
2517-17th St. Great Bend, Kansas  
(Address)

SUBSCRIBED AND SWORN TO before me this 22nd day of May, 19 53

Vivian J. Ginger  
Notary Public.

My commission expires November 29, 1954.

24-2675-S 2-52-20M

PLUGGING  
FILE SEC 30 T 10 R 19 W  
BOOK PAGE 94 LINE 1

KELLER NO. 2 WELL

LOCATION: SW $\frac{1}{4}$  SW $\frac{1}{4}$  SE $\frac{1}{4}$  Sec. 30-10S-19W Rooks County, Kansas  
 OPERATOR: Birmingham-Bartlett Drilling Co.  
 CONTRACTOR: Birmingham-Bartlett Drilling Co.  
 SURFACE CASING: Set 8-5/8" 24# casing at 192 ft. with 125 sacks cement and 1 c.c.  
 OIL STRING: 5-1/2" O.D. 14# J-55 casing set at 3783' with 175 sacks cement.

SPUDDED: 1-24-51  
 COMPLETED: 2-4-51

LOG

(Figures indicate bottom of formation)

0	to	192	Surface
		840	Shale
		925	Shale and sand
		1090	Shale
		1380	Sand
		1465	Shale
		1612	Shale, sand and red bed
		1653	Anhydrite
		2245	Shale and shells
		2265	Shale
		2665	Shale and lime
		2990	Shale
		3200	Shale and lime
		3775	Lime
		3781	Simpson
		3784	Arbuckle
		3784	Total Depth

The undersigned Richard Hindery of the Birmingham-Bartlett Drilling Co. hereby certifies that the above is a true and correct log of the formations encountered in drilling the Keller No. 2 well as shown on the daily drilling reports.

BIRMINGHAM-BARTLETT DRILLING CO.

BY Richard Hindery

Subscribed and sworn before me this 7th day of February, 1951.

Vivian J. Genger  
Notary Public

My commission expires November 29, 1954.

**PLUGGING**  
 FILE SEC-30T10 R194  
 BOOK PAGE 24 LINE 1