

STATE OF KANSAS  
STATE CORPORATION COMMISSION


Form CP-4

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
212 No. Market  
Wichita, Kansas 67202

WELL PLUGGING RECORD

Rooks County, Sec. 14 Twp. 10 Rge. 10 (E) (W) x  
Location as "NE/CNW%SW%" or footage from lines NE NW NE  
Lease Owner Kewanee Oil Co.  
Lease Name Catuda "A" Well No. #1  
Office Address Herington, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole)  
Date well completed 19  
Application for plugging filed 19  
Application for plugging approved 19  
Plugging commenced 8-31-70 19  
Plugging completed 9-3-70 19  
Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced?

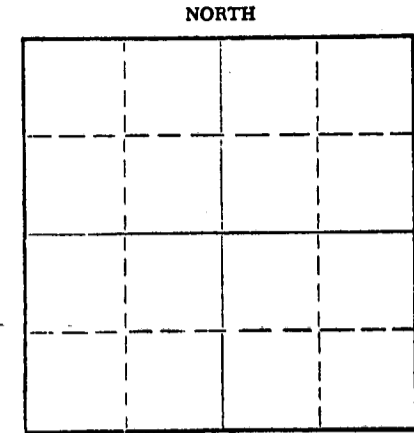

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Leo Massey  
Producing formation Depth to top Bottom Total Depth of Well 3595' Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				5 1/2"	3593'	2636.13'
				8 5/8"	1445'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Made bottom hole plug back with sand from 3601' to 3580'. Mixed and ran 4 sacks cement thru dump bailer from 3580' to 3548'. Sand from 3548' to 3175'. Mixed and ran 4 sacks cement thru dump bailer from 3175' to 3143'.  
Mudded hole to 720' - set 20' rock bridge. Filled hole with 3 yards ready-mix from 700' to 475'. Mudded hole from 475' to 240'. Set 15' rock bridge. Filled hole with 3 yards ready-mix from 225' to base of cellar.

RECEIVED  
STATE CORPORATION COMMISSION  
9-14-70  
SEP 14 1970  
CONSERVATION DIVISION  
Wichita, Kansas


(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Southwest Casing Pulling Co.  
Address Box 364, Great Bend, Kansas

STATE OF Kansas, COUNTY OF Barton, ss.  
Southwest Casing Pulling Co. (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) W. C. Spencer Sec.  
Box 364, Great Bend, Kansas  
(Address)

SUBSCRIBED AND SWORN TO before me this 11 day of September, 19 70



Sidney Miller  
Notary Public.

My commission expires

15-163-01932-0000  
 RECEIVED  
 STATE CORPORATION COMMISSION  
 AUG 7 1970  
 CONSERVATION DIVISION  
 Wichita, Kansas

*Wichita file*

WELL LOG CATALOG NO. 1

Darby & Bothwell - Lease Owners

Sec. 14, Twp. 10, Range 19W

Donald T. Ingling - Contractor

Location: NE NW NE

Total Depth: 3595'

County: Rooks (Kansas)

Commenced: November 25, 1945  
 Completed: December 19, 1945

Elevation: 2092'

Casing: 1445' of 8 5/8"

Productions:

Figures below indicate bottom of formations

30	Surface sand & clay	2345	Lime
40	Post rock	2450	Lime shale
840	Shale & shells	2550	shale & shells
885	Hard sand - pyrite	2570	Lime shale
1020	Shale & shells	2600	Lime
1160	Sand	2620	Lime shale
1205	Shale, shells & red rock	2720	Lime
1434	Red sd	2780	Lime shale
1441	Cg.	2865	Lime
1470	Anhydrite	3020	Lime shale
1490	Shale & shells	3145	Lime
1630	Shale, shells & red	3550	Lime shale
1875	Shale, shells & salt	3565	shale, limestone
1980	Shale & salt	35-3	Lime & shale (cherty streaks)
2010	Shale - shells	3595	Red sand
2100	Lime shale		

I hereby certify that this is a true and correct log of the above-mentioned well.

Donald T. Ingling  
*Donald T. Ingling*  
 \_\_\_\_\_

State of Kansas  
 ss.  
 \_\_\_\_\_

Subscribed and sworn to before me, a Notary Public in said County and State of Kansas on the 20th day of December, 1945.

*W. J. ...*  
 \_\_\_\_\_  
 Notary Public

My Commission expires 4/10/48