

STATE OF KANSAS  
STATE CORPORATION COMMISSION


15-051-22613-00-00

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to  
Conservation Division  
State Corporation Comm.  
245 North Water  
Wichita, KS 67202

Ellis County, Sec. 15 Twp. 12S. Rge. 16 ~~XY~~W  
Location as "NE/CNW $\frac{1}{2}$ SW $\frac{1}{2}$ " or footage from lines  
NW SE NW

Lease Owner Dreiling Ltd. of Colorado  
Lease Name Dickinson Well No. 2-15  
Office Address 410 - 17th St., Suite 1140, Denver, Co. 80202  
Character of Well (Completed as Oil, Gas or Dry Hole)  
Dry Hole

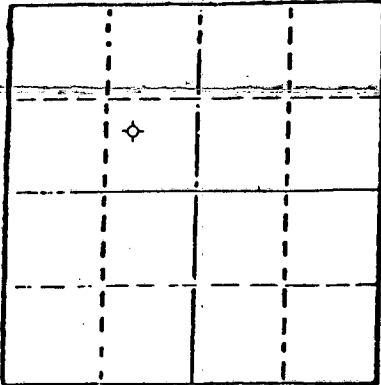

Locate well correctly on above  
Section Plat

Date Well completed January 20 19 82  
Application for plugging filed January 26 19 82  
Application for plugging approved January 28 19 82  
Plugging commenced January 20 2:00 AM 19 82  
Plugging completed January 20 4:00 AM 19 82  
Reason for abandonment of well or producing formation  
Non-productive  
If a producing well is abandoned, date of last production  
None 19

Was permission obtained from the Conservation Division or  
its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Gilbert Scheck  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 344'  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	197'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid  
was placed and the method or methods used in introducing it into the hold. If cement or other  
plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to  
\_\_\_\_\_ feet for each plug set. Hole full of heavy mud - cement plugs with 50-50  
regular Portland and Pozmix 4% Gel - 3% CC  
Pumped through drill pipe as follows:  
1st plug at 660' with 70 sacks  
2nd plug at 200' with 40 sacks  
3rd plug with solid bridge of hulls at 40' with 10 sacks  
Rathole with 10 sacks  
Mousehole with 5 sacks.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Halliburton


STATE OF Colorado COUNTY OF Denver, ss.  
Leslie Olson (employee of owner) or (owner or operator)

I, the above-described well, being first duly sworn on oath, says: That I have knowledge of  
the facts, statements, and matters herein contained and the log of the above-described well  
is filed and that the same are true and correct. So help me God.

(Signature) Leslie Olson  
410 17th St., Suite 1140, Denver, Co. 80202  
(Address)

SUBSCRIBED AND SWORN TO before me this 2nd day of February, 19 82

Commission expires



Lorraine C. Murphy Public.

RECEIVED  
STATE CORPORATION COMMISSION

FEB - 4 1982  
2-4-1982  
CONSERVATION DIVISION  
Wichita, Kansas