


STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

Form CP-4

15-051-20528-00-00
WELL PLUGGING RECORD

NORTH

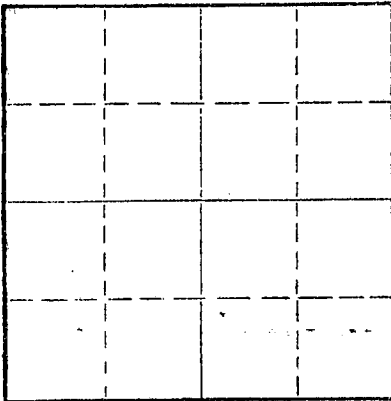

Locate well correctly on above
Section Plat

Ellis County, Sec. 15 Twp. 12 Rge. 16 (E) W (W)

Location as "NE/CNW/SW" or footage from lines NW SE SW

Lease Owner Haynes Oil Company

Lease Name J. Froelich Well No. 1

Office Address Box 329, Russell, Kansas 67665

Character of Well (completed as Oil, Gas or Dry Hole) Dry hole

Date well completed December 2, 19 69

Application for plugging filed December 2, 19 69

Application for plugging approved December 2, 19 69

Plugging commenced December 2, 19 69

Plugging completed December 2, 19 69

Reason for abandonment of well or producing formation Dry hole

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Leo Massey

Producing formation Depth to top Bottom Total Depth of Well 3,425 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	232'	Cmtd. w/150 sax

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Fill hole w/-heavy mud
Set bridge plug @ 500'
Dump 50 sax cement on plug thru 4 1/2" drill pipe
Set bridge plug @ 210'
Dump 20 sax cement on plug thru 4 1/2" drill pipe
Set bridge plug @ 40' w/ 1/2 sax hulls on plug
Dump 10 sax cement on plug to cellar

RECEIVED
STATE CORPORATION COMMISSION
DEC 5 - 1969
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Shields Drilling Co., Inc.

Address Shields Bldg., Russell, Kansas

STATE OF Kansas, COUNTY OF Russell
R. J. Shields (employee of owner) or contractor of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.


(Signature) R. J. Shields

Shields Bldg., Russell, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 4th day of December, 1969

L. Phillips

Notary Public.






Shields

Russell, Kansas

WELL LOG 15-051-Z0528-00-00

Operator: Haynes Oil Company
Well: J. Froelich #1
Commenced: November 24, 1969
Completed: December 2, 1969
Contractor: Shields Drilling Co., Inc.

Well Description: NW SE SW
Sec. 15-12S-16W
Ellis County, Kansas



CASING RECORD

Size	Run	Pulled
8 5/8"	232'	Cmtd. w/ 150 sax

Elevation:
Treatment:
Production: D & A
Tops:

..... Figures Indicate Bottom of Formations

Shale	238'
Shale & sand	690'
Redbed & shale	1,053'
Anhydrite	1,084'
Shale & shells	1,735'
Lime & shale	2,840'
Lime	2,916'
Lime & shale	3,077'
Lime	3,425' RTD

RECEIVED
STATE CORPORATION COMMISSION
12-5-69
DEC 5 1969
CONSERVATION DIVISION
Wichita, Kansas

Notes