

15-163-00260-0000

STATE OF KANSAS
STATE CORPORATION COMMISSION


WELL PLUGGING RECORD

OR
FORMATION PLUGGING RECORD

Strike out upper line when reporting plugging off formations.

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bittling Building
Wichita, Kansas

Rooks County. Sec. 9 Twp. 10 Rge. 19 (XXXX) (W)
Location as "NE 1/4 NW 1/4 SW 1/4" or footage from lines. NW NW NW
Lease Owner. Royer-Farris Drilling Company
Lease Name. Baldwin Well No. 1
Office Address. 709 Brown Building, Wichita 2, Kansas.
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed. 3-20 3 19 45
Application for plugging filed. 3-20 19 45
Application for plugging approved. 3-20 19 45
Plugging commenced. 3-20 19 45
Plugging completed. 3-21 19 45
Reason for abandonment of well or producing formation. Dry Hole

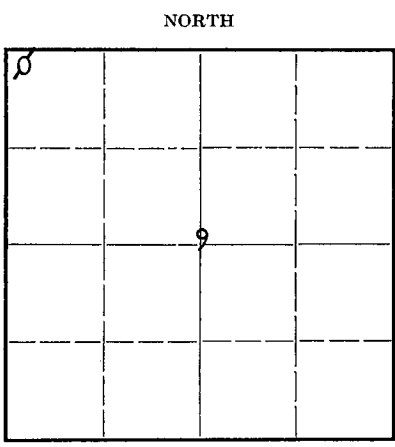

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production. 19...
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well. Kerr
Producing formation. Depth to top. Bottom. Total Depth of Well. 3784 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
					200 Ft.	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from 195 feet to feet for each plug set.
Mixed Heavy mud. Filled hole to within 195 ft. of the top. Set plug and placed 15 sacks of cement on plug. Filled hole with heavy mud to within 40 ft. of top. Set plug. Placed 15 sacks of cement within 2 ft. of top and closed same by welding plate on surface pipe.

9 10 1945
7 17

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to Royer-Farris Drilling Company
Address. 709 Brown Building, Wichita 2, Kansas.

STATE OF Kansas, COUNTY OF Sedgewick, ss.
L. A. Farris (Signature) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) [Signature]
709 Brown Building, Wichita 2, Kansas.
(Address)

SUBSCRIBED AND SWORN to before me this 26th day of March 19 45.
Effie J. Lantz Notary Public.

My commission expires April 23, 1945.

3-27-45

WELLS 1 N 1/2 NW 34 Section 9, Township 10, South, Range 19, East, Rooks County, Kansas.

Contractor: Royer-Farris Drilling Company
Drilling Started: February 28, 1945.
Drilling Completed: March 20, 1945.
Elevation: 2219'
2 1/2" of 8 5/8" surface pipe cemented with 100 sacks cement.

0	15	top soil and clay
15	125	sand
125	200	shale
200	575	shale sand and shells
575	960	shale and shells
960	1375	sand and shale
1375	1640	shale and shells
1640	1660	anhydrite
1660	1760	shale and shells
1760	1870	lime and shale
1870	1995	shale
1995	2120	shale and shells
2120	2145	lime and shale
2145	2250	shale and shells
2250	2380	lime and shale
2380	2470	shale
2470	2530	lime and shale
2530	2645	lime
2645	2775	lime and shale
2775	2890	lime
2890	3005	shale and lime
3005	3090	lime
3090	3140	shale
3140	3205	lime and shale
3205	3690	lime
3690	3758	conglomerate
3758	3767	lime and shale and sand
3767	3784	Arbuckle lime
	3784	Total Depth - Rotary measurements

Sample tops derrick floor by Walter Larrab.

Top Lansing	3438 (-1219)
Top Conglomerate	3690 (-1471)
Top Resorted Arbuckle	3756 (-1537)
Top Arbuckle	3765 (-1546)
Total Depth	3782

H. H. Royer does hereby swear that he is a partner of the firm, Royer-Farris Drilling Company, who were the drilling contractors on the above described well and that the above log is true and correct to the best of his knowledge and belief.

H. H. Royer

STATE OF KANSAS)
COUNTY OF ROOKS)

9 10 19W
7 17

BE IT REMEMBERED, That on this 21st day of March, A. D. 1945, before me, a Notary Public in and for said County and State, personally appeared H. H. Royer to me known to be the identical person described in and who executed the within and foregoing instrument and acknowledged to me that he executed the same as his free and voluntary act and deed for the uses and purposes therein set forth.

IN WITNESS WHEREOF, I have hereunto set my official signature and affixed my notarial seal, the day and year first above written.

Effie J. Lote
Notary Public

My commission expires April 23, 1945.