

15-163-03383-0000

STATE OF KANSAS  
STATE CORPORATION COMMISSION


WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
800 Bittling Building  
Wichita, Kansas

Rooks County, Sec. 1 Twp. 10S Rge.      (E) 20 (W)

Location as "NE/CNW/SW" or footage from lines \_\_\_\_\_  
Lease Owner Champlin Refining Company  
Lease Name Sutor "A" Well No. 6  
Office Address P.O. Dr. #552, Enid, Oklahoma  
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole  
Date well completed September 9, 1952  
Application for plugging filed September 9, 1952  
Application for plugging approved September 9, (Verbal) 1952  
Plugging commenced September 9, 1952  
Plugging completed September 9, 1952  
Reason for abandonment of well or producing formation \_\_\_\_\_

NORTH



Locate well correctly on above  
Section Plat

If a producing well is abandoned, date of last production \_\_\_\_\_ 19\_\_\_\_  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Mr. Eldon Petty  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 3873' Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8" OD	164'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Filled hole with heavy mud from 3873' T.D. to 165' and pushed Halliburton plug to 165' and dumped 15 sacks cement then filled hole with heavy mud from top of cement to 40' and pumped in a wooden plug and dumped 1/2 sack of hulls and then filled hole with cement to bottom of cellar using 10 sacks cement.

RECORDED  
STATE OF KANSAS  
9-13-52

CONFIRMED

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Champlin Refining Company  
Address P.O. Dr. #552, Enid, Oklahoma

STATE OF Kansas, COUNTY OF Barton, ss.  
Jean W. Meyers (employee of owner) or ~~(owner or operator)~~ of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Jean W. Meyers  
P.O. Box 167, Ellingwood, Kansas  
(Address)


SUBSCRIBED AND SWORN TO before me this 11th day of September, 1952

M. Kenneth Stearns  
Notary Public.

My commission expires September 10, 1955

RECORDED  
INDEXED  
SEP 10 1952  
STATE OF KANSAS  
WELL PLUGGING RECORD

(Note: In Kansas only for recording formation record)

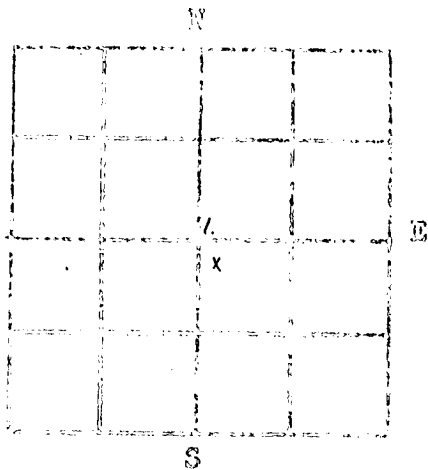

COUNTY Rooks SEC. 1 TWP. 10S RGL. 20W  
 COMPANY OPERATING Champlin Refining Company  
 OFFICE ADDRESS Box 552 - Enid, Oklahoma  
 FARM NAME Sutor A WELL NO. 6  
 WELL LOCATED NW/4 NW/4 SE/4 or 2310' from South Line &  
2310' from East Line SE/4 Sec.1-10S-20W  
 CHARACTER OF WELL Dry Hole

DRILLING COMMENCED August 27, 1952 DRILLING COMPLETED September 9, 1952

SIZE	WEIGHT	THDS	MAKE	FT.	INS.	AMOUNT PULLED	CONTENT
8-5/8"	28 1/2	8 Rd	National	163.29		None	100 Sacks

FORMATION RECORD

	<u>TOPS</u>	<u>BOTTOM</u>		<u>TOPS</u>	<u>BOTTOM</u>
Sand-Shale	0	170	<u>Geological Tops</u>		
Shale-Shells-Sand	170	1000	Heebner		3440
Shale-Sand	1000	1390	Toronto		3462
Shale-Sand-Redbed	1390	1670	Lansing-K.C.		3478
Anhydrite	1670	1710	Cherty Conglomerate		3740
Shale-Shells	1710	2215			
Shale-Lime	2215	2415			
Shale-Lime	2415	2544			
Shale-Lime	2544	3657			
Lime	3657	3711			
Conglomerate	3711	3873 T.D.			

**PLUGGING**  
 FILE SEC 1 T 10 R 20W  
 BOOK 114 LINE 17

*J. G. Wentworth*  
 RECEIVED  
 STATE CORPORATION COMMISSION  
 SEP 16 1952  
 CONSERVATION Commission Expires August 14, 1954  
 Wichita, Kansas

Subscribed and sworn to before me  
 this 15 day of September 1952

*Don Mice*  
 Notary Public