


STATE OF KANSAS
STATE CORPORATION COMMISSION

15-051-21410-00-00

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Ellis County, Sec. 9 Twp. 12 Rge. 17 E/W
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines
NW SE NE
Lease Owner F & M Oil Co., Inc.
Lease Name Dreiling Well No. 1
Office Address 505 Union Center, Wichita, Ks. 67202
Character of Well (Completed as Oil, Gas or Dry Hole)

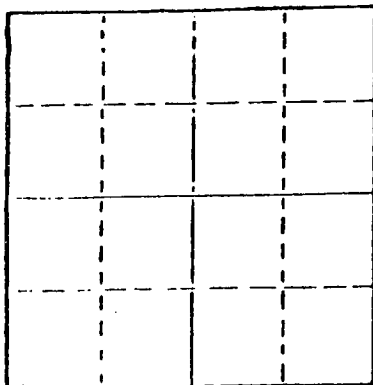

Locate well correctly on above
Section Plat

Dry Hole
Date Well completed Nov. 18 1977
Application for plugging filed Nov. 18 1977
Application for plugging approved Nov. 18 1977
Plugging commenced Nov. 18 1977
Plugging completed Nov. 18 1977
Reason for abandonment of well or producing formation
Dry Hole

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Leo Massey
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3383
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

| FORMATION | CONTENT | FROM | TO | SIZE | PUT IN | PULLED OUT |
|-----------|---------|------|----|------|--------|------------|
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Hole full of heavy mud to 550' w/70 sacks 50/50 Pozmix, 2% Gel thru drill pipe
Mud to 240' w/20 sacks 50/50 Pozmix, 2% Gel thru drill pipe
Mud to 40' w/ $\frac{1}{2}$ sack hulls plug and 10 sacks cement.

RECEIVED
STATE CORPORATION COMMISSION
11-23-1977
NOV 23 1977

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Duke Drilling Co.

STATE OF KANSAS COUNTY OF BARTON, ss.
Larry Curtis (employee of owner) or (owner or operator)
of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Larry Curtis
Box 823, Great Bend Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 22nd day of November, 19 77

Beretty M. Hogue
Notary Public.

My commission expires April 11, 1978



15-051-21410-00-00

DRILLERS' WELL LOG

DATE COMMENCED: November 11, 1977
DATE COMPLETED: November 18, 1977

F & M Oil Co., Inc.
DRILLING # 1
NW SE NE
Sec 9-T12-R17W
Ellis County, Kansas

ELEVATION: 2132 K.B.

| | |
|--------------|--------------------------------|
| 0 - 256' | Post Rock, Shale, Streaks Sand |
| 256 - 1342' | Shale, Sand |
| 1342 - 1382' | Anhydrite |
| 1382 - 1964' | Shale |
| 1964 - 3155' | Shale, Lime |
| 3155 - 3338' | Lime and Shale |
| 3338 - 3342' | Shale |
| 3342 - 3362' | Lime and Shale |
| 3362 - 3383' | Lime |
| 3383' | RTD |

FORMATION TOPS

| | |
|-----------|------|
| Anhydrite | 1342 |
| Heekner | 3338 |
| Toronto | 3362 |
| RTD | 3383 |

SURFACE PIPE:

Set used 8 5/8", 28' pipe
at 256' w/150 tanks Common,
2 1/2 Gal, 3/4 cc.

A F F I D A V I T

STATE OF KANSAS }
COUNTY OF BARTON } ss.

Larry Curtis, of lawful age, does swear and state that the facts and statements herein contained are true and correct to the best of his knowledge.

Larry Curtis

Subscribed and sworn to before me this 22nd day of November 1977.

Maureen M. Sague
Notary Public

My Commission Expires: April 11, 1978

RECEIVED
STATE CORPORATION COMMISSION
11-23-1977
NOV 23 1977
CONSERVATION DIVISION
Topeka, Kansas