

15-051-01202-00-00
DISTRICT CONSERVATION AGENT'S REPORT

TO:

State Corporation Commission
Conservation Division
800 Bitting Building
Wichita, Kansas

FILE NO. _____

LOCATION SE SE NE

SEC. 29 TWP. 12 RGE. 16

Dry Hole ☒ Abandoned Oil Well _____ Abandoned Gas Well _____

I have today completed supervision of plugging of:

Well No. 1 Lease Dodge

Operator H. H. Blair Address Wichita, Kans

Field _____ County Ellis

Total Depth 3628 Feet.


(Describe briefly the manner in which the well was plugged)

8 5/8" at 124' circulated with cement - 5 1/2" at 3598' with
50 sax cement behind.

Filled with chat to 3595' set 4 sax cement with dump bailer
pulled 3205' 5 1/2", filled hole with heavy mud to 135', set
rock bridge and 20 sax cement, set rock bridge at 40' and
10 sax cement to bottom cellar.

RECEIVED

Conservation Div. 9-16-1950

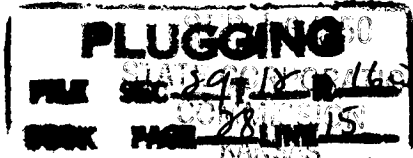

Edna Perry
District Conservation Agent

Date 9-12-50