

15-163-00867-0000

STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bitting Building
Wichita, Kansas

WELL PLUGGING RECORD

Rooks County, Sec. 8 Twp. 10 Rge. 20 (E) W (W)

Location as "NE/CNW%SW%" or footage from lines NW NE NE

Lease Owner D. G. Hansen

Lease Name Oesterreich Well No. 3

Office Address Logan, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed November 3 19 55

Application for plugging filed November 3 19 55

Application for plugging approved November 3 19 55

Plugging commenced November 4 19 55

Plugging completed November 4 19 55

Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Eldon Petty, Hays, Kansas

Producing formation Depth to top Bottom Total Depth of Well 3880 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	161'	none

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Filled hole with heavy mud to 155'.
Set plug. Put in 1/2 sack Hulls and 15 sacks cement. Filled with heavy mud up to 40'. Set plug. Filled to top with 1/2 sack Hulls and 10 sacks cement.

STATE CORPORATION COMMISSION
11-15-55 NO. 1-300
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor C-G Drilling Co.

Address 107 Rule Bldg., Wichita, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss.

Jay H. Galloway (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Jay H. Galloway
Jay H. Galloway
107 Rule Bldg., Wichita, Kansas (Address)

SUBSCRIBED AND SWORN to before me this 10th day of November, 19 55

My commission expires May 20, 1959
Vicky Jacobs Notary Public



PLUGGING
FILE SEC-8-T-10-R-200
BOOK PAGE 14 LINE 25

15-163-00867-0080

CONTRACTOR'S WELL LOG

OPERATOR D. G. HANSEN WELL NAME OESTERREICH #3

LOCATION NW NE NE Sec. 8-10-20 RIG #1

COUNTY ROOKS STATE KANSAS

COMMENCEMENT DATE OCTOBER 25, 1955 COMPLETION DATE NOVEMBER 3, 1955

LOG OF WELL

Elevation 2244' rotary bushing.
All measurements from the top of rotary bushing.

FROM	TO	FORMATION	DEVIATION FROM VERTICAL	REMARKS
0	161	Shale		
161	800	Shale		
800	880	Shale		
880	980	Sand		
980	1220	Shale-Sand		
1220	1485	Sand		
1485	1755	Red Bed		
1755	1782	Anhydrite		
1782	2100	Shale-Shells		
2100	2920	Shale-Lime	0° - 2500'	
2920	3340	Shale-Lime		
3340	3530	Shale-Lime	0° - 3500'	
3530	3610	Shale-Lime		
3610	3635	Lime		
3635	3760	Shale-Lime	0° - 3750'	
3760	3815	Shale-Lime-Chert		
3815	3850	Shale-Chert		
3850	3880	TD		

CASING LEFT IN HOLE AFTER COMPLETION

161' of 8-5/8" CD Surface Casing


STATE OF KANSAS, COUNTY OF SEDGWICK) ss.

The undersigned certifies that to the best of his knowledge and belief, the above facts are true and correct.


C-G DRILLING CO.

By Jay H. Galloway
Jay H. Galloway

Subscribed and sworn to before me this 4th day of November, 1955.

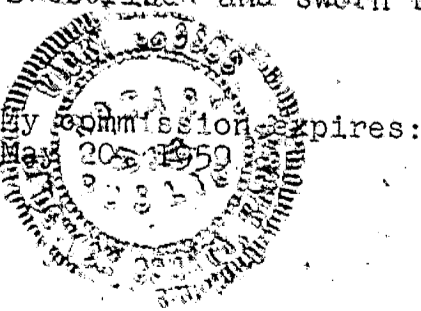

Vicky Jacobs
Vicky Jacobs, Notary Public



PLUGGING
FILE SEC 8 T. 10 R 20W
BOOK PAGE 14 LINE 75