

15-163-00606-0000

STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bittling Building
Wichita, Kansas

WELL PLUGGING RECORD

Books _____ County. Sec. 8 Twp. 10 Rge. (E) 20 (W)

Location as "NE/CNW/SW" or footage from lines 52 - 54 - 56

Lease Owner Chaplin Refining Company

Lease Name Roy C. Banker Well No. 3

Office Address P.O. Dr. #552 Enid, Oklahoma

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed September 21, 19 52

Application for plugging filed September 26, 19 52

Application for plugging approved September 21, (Verbal) 19 52

Plugging commenced September 21, 19 52

Plugging completed September 21, 19 52

Reason for abandonment of well or producing formation _____

Reason for abandonment of well or producing formation _____

If a producing well is abandoned, date of last production _____ 19 _____

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Eldon Petty, Paws, Kansas

Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3898 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

| FORMATION | CONTENT | FROM | TO | SIZE | PUT IN | PULLED OUT |
|-----------|---------|------|----|-------------|--------|------------|
| | | | | 8 5/8" O.D. | 155' | None |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Filled hole with heavy mud from 3898' T.D. to 155' and set Halliburton plug at 155' and dumped in 1/2 sack of bulls and set plug using 15 sacks of cement then filled hole with heavy mud from top of cement to 40' and set plug and dumped in 1/2 sack of bulls and filled hole with cement to bottom of collar using 10 sacks cement.

RECEIVED
STATE CORPORATION COMMISSION
9-30-52
SEP 30 1952
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Chaplin Refining Company

Address P.O. Dr. #552, Enid, Oklahoma

STATE OF Kansas, COUNTY OF Barton, ss. S. F. Hall (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) S. F. Hall


P.O. Box 167, Millinwood, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 26th day of September 19 52

My commission expires September 10, 1955 N. Kenneth Stevia Notary Public.

PLUGGING
FILE SEC 272 R 202
BOOK PAGE 48 LINE 12

(For use in Kansas only for reporting formation record)

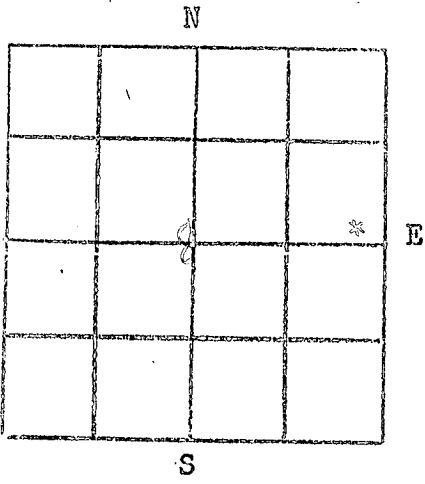

COUNTY Rooks SEC. 8 TWP. 10S RGE. 20W
 COMPANY OPERATING Champlin Refining Company
 OFFICE ADDRESS Box 552 - Enid, Oklahoma
 FARM NAME Roy O. Wanker WELL NO. 3
 WELL LOCATED SE/4 SE/4 NW/4, or 2310' from the North Line
and 2310' from the West Line of the NW/4
 CHARACTER OF WELL Dry Hole

DRILLING COMMENCED September 7, 1952 DRILLING COMPLETED September 21, 1952

| SIZE | WEIGHT | THDS | MAKE | FT. | INS. | AMOUNT PULLED | CEMENT |
|--------|--------|------|----------|---------|------|---------------|-----------|
| 8-5/8" | 28# | 8 Rd | National | 158.09' | | | 100 Sacks |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |

FORMATION RECORD

| | <u>TOPS</u> | <u>BOTTOM</u> | | <u>TOPS</u> | <u>BOTTOM</u> |
|------------------------|-------------|---------------|--|-------------|---------------|
| Clay-Sand-Shale-Shells | 0 | 156 | | | |
| Shale-Sand | 156 | 310 | | | |
| Shale-Sand-Shells | 310 | 1500 | | | |
| Redbed-Shells | 1500 | 1580 | | | |
| Redbed | 1580 | 1770 | | | |
| Anhydrite | 1770 | 1910 | | | |
| Shale-Shells | 1910 | 2120 | | | |
| Shale-Lime | 2120 | 2270 | | | |
| Shale-Lime-Shells | 2270 | 2385 | | | |
| Shale-Lime | 2385 | 2680 | | | |
| Lime | 2680 | 2723 | | | |
| Shale-Lime | 2723 | 3448 | | | |
| Lime | 3448 | 3495 | | | |
| Shale-Lime | 3495 | 3554 | | | |
| Lime | 3554 | 3584 | | | |
| Lime | 3584 | 3748 | | | |
| Lime-Shale | 3748 | 3771 | | | |
| Lime | 3771 | 3787 | | | |
| Lime-Conglomerate | 3787 | 3832 | | | |
| Chert-Conglomerate | 3832 | 3840 | | | |
| Shale-Conglomerate | 3840 | 3876 | | | |
| Simpson | 3876 | 3884 | | | |
| Arbuckle | 3884 | 3898 T.D. | | | |

Geological Tops

| | |
|------------------|------|
| Heebner | 3524 |
| Toronto | 3548 |
| Lansing-K.C. | 3564 |
| Base K.G. | 3781 |
| Top Conglomerate | 3825 |
| Simpson | 3858 |
| Arbuckle | 3883 |

Elevation: 2,282' R.B.

[Handwritten Signature]
 Superintendent

Subscribed and sworn to before me
 this 30 day of September, 1952

[Handwritten Signature]
 Notary Public

RECEIVED
 STATE COMMISSION

Commission Expires August 14, 1954

OCT 2 1952

GENERAL INVESTIGATION DIVISION
 STATE COMMISSION

PLUGGING
 FILE SEC 8 T 10 R 2034
 BOOK PAGE 47 LINE 13