


STATE OF KANSAS  
STATE CORPORATION COMMISSION

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to  
Conservation Division  
State Corporation Commission  
245 North Water  
Wichita, KS 67202

15-051-21058-00-00  
WELL PLUGGING RECORD

FORM CP-4

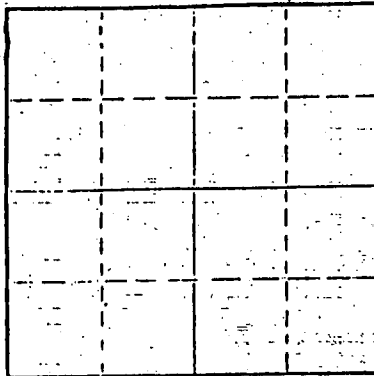

Locate well correctly on above  
Section Plat.

Ellis County, Sec. 29 Twp. 12 Rge. 16 (E) (W) X  
Location as "NE/CNW/SW" or footage from lines NE/NW/NE  
Lease Owner Shields Oil Producers, Inc.  
Lease Name Dickinson Well No. 1  
Office Address Shields Building, Russell, Kansas 67665  
Character of Well (completed as Oil, Gas or Dry Hole)  
Date well completed 19  
Application for plugging filed August 26 1976  
Application for plugging approved 19  
Plugging commenced October 4 1976  
Plugging completed October 14 1976  
Reason for abandonment of well or producing formation depleted  
If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Leo F. Massey  
Producing formation Depth to top Bottom Total Depth of Well 3615  
Show depth and thickness of all water, oil and gas formations

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
STATE CORP.				8 5/8"	275'	none
UST 2	2407h			5 1/2"	3609'	3,089.94'
CONSERVATION	Wichita					

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Measured total depth at 3615'. Sanded to 3575' and dumped 5 sacks cement.

Shot pipe @ 3200' and 3120'. Spotted 70 bbls. oil.

Pulled a total of 74 joints of 5 1/2" casing.

Squeezed well with 3 sacks hulls, 20 sacks gel and 100 sacks cement with 4% added gel.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Rockhold Engineering, Inc.  
Address Box 698, Great Bend, Kansas 67530

STATE OF Kansas COUNTY OF Barton ss.

James W. Rockhold (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.



(Signature)

James W. Rockhold

Box 698, Great Bend, Kansas 67530

(Address)

SUBSCRIBED AND SWORN TO before me this 21st day of October 1976

My commission expires May 21, 1980

Marla K. Haslam

Marla K. Haslam

Notary Public.




# Shields

Russell, Kansas

## WELL LOG

Operator: Shields Oil Producers, Inc.  
 Well: Dickinson #1  
 Commenced: May 10, 1975  
 Completed: May 20, 1975  
 Contractor: Shields Drilling Co., Inc.

Well Description: NE NW NE  
 Sec. 29-12S-16W  
 Ellis County, Kansas



### CASING RECORD

Size	Run	Pulled
8 5/8"	269'	Cemented w/175sax
5 1/2"	3,609'	Cemented w/ 75sax

Elevation: 2,125' KB

Treatment:

Production:

Tops:

..... Figures Indicate Bottom of Formations .....

Rock & sand	50'
Clay	80'
Shale	663'
Sand	726'
Shale	920'
Redbed & shale	1,285'
Anhydrite	1,323'
Shale & lime	3,032'
Lime	3,615' RTD

RECEIVED  
 STATE CORPORATION COMMISSION  
 8-30-1976  
 AUG 30 1976  
 CONSERVATION DIVISION  
 Wichita, Kansas

Notes