


15-163-02055-0000

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Rooks County. Sec. 11 Twp. 10 Rge. 20 NW
Location as "NE/CNW $\frac{1}{2}$ SW $\frac{1}{2}$ " or footage from lines NE-NW-SW
Lease Owner F.O. Miller Inc.
Lease Name Creefoot Well No. 8
Office Address P.O. Box 124 Ellis, KS 67637
Character of Well (Completed as Oil, Gas or Dry Hole) Oil

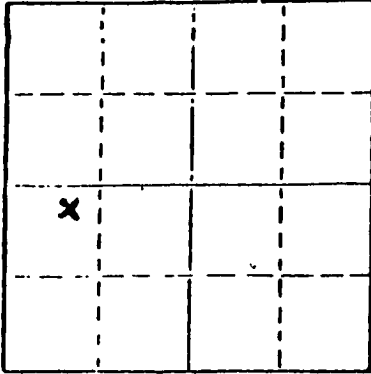

Locate well correctly on above Section Plat

Date Well completed 6-7-54 19
Application for plugging filed 12-1-83 19
Application for plugging approved _____ 19
Plugging commenced _____ 19
Plugging completed _____ 19
Reason for abandonment of well or producing formation Oil depleted
If a producing well is abandoned, date of last production 1-1-1970 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? YES

Name of Conservation Agent who supervised plugging of this well Dennis Hamel
Producing formation Arkwickle Depth to top 3813 Bottom 3817 Total Depth of Well _____
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8"	178	-0-
				5"	3816	-0-

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set. Well had 25 sacks of cement with hulls, 20 sacks of gel, 150 sacks of cement at 500ft max, shut in at 300ft... 5 1/2" casing
Well had been two-staged, check 8 5/8" with 500ft.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor HALL BURTON

STATE OF Kansas COUNTY OF Rooks, ss.
Louis D. Bowman (employee of owner) or (owner or operator)
of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Louis D. Bowman
Box 37 Cadell, KS 67630
(Address)

SUBSCRIBED AND SWORN TO before me this 22 day of Dec., 19 83

Vesta J. Russell
Notary Public.

My commission expires July 17, 1984

VESTA J. RUSSELL
Rooks County, Kansas
My App. Exp. 7-17-84


STATE CORPORATION COMMISSION
1-18-84
JAN 12 1984
CONSERVATION DIVISION
Wichita, Kansas

Company- C - G DRLG.
Farm- Croffoot No. 8

SEC. 11 T. 10 R. 20W
NE NW SW

Total Depth. 3817'
Comm. 5-31-54 Comp. 6-7-54
Shot or Treated.
Contractor.
Issued. 9-11-54

County Rooks
KANSAS



CASING:
8 5/8" 178.38' w/135 sx cem.
5 1/2" 3816.97' w/125 sx cem.

Elevation. 2241' D F

Production. 23 Bbls./NW

Figures indicate Bottom of Formations.

shale 830
sand 950
shale 1170
sand 1400
red bed 1695
anhydrite 1735
shale 2100
shale-lime 3817
Total Depth

TOPS: Scout
Lansing 3512
Base Kansas City 3725
Arbuckle 3813

RECORDED
STATE GEOLOGICAL COMMISSION

JAN 12 1954

CONSERVATION DIVISION
Wichita, Kansas