

15-163-02086-0000

STATE OF KANSAS  
STATE CORPORATION COMMISSION

Form CP-4

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
212 No. Market  
Wichita, Kansas

Rooks County. Sec. 12 Twp. 10 Rge. ~~XX~~ 20 (W)

Location as "NE/CNW/SW" or footage from lines C S/2 S/2 SW

Lease Owner Sohio Petroleum Company

Lease Name Sutor "B" Well No. 6

Office Address Box 673, Russell, Kansas 67665

Character of Well (completed as Oil, Gas or Dry Hole) Oil

Date well completed 12-19 19 50

Application for plugging filed 4-15 19 66

Application for plugging approved 4-19 19 66


Plugging commenced 4-29 19 66

Plugging completed 4-30 19 66

Reason for abandonment of well or producing formation Uneconomical

If a producing well is abandoned, date of last production July 19 61

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

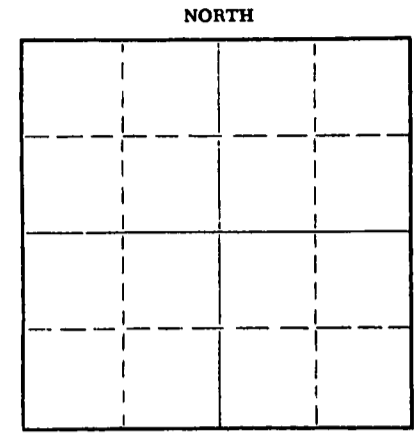

Name of Conservation Agent who supervised plugging of this well Leo Massey

Producing formation Arbuckle Depth to top Bottom Total Depth of Well 3761 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	301'	--
				5-1/2"	3,756'	--

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Mixed 55 sacks cement, pumped into casing; shut casing in, mixed 10 sacks cement and pumped into surface casing; casing standing full of cement.

RECEIVED  
STATE CORPORATION COMMISSION  
5-4-66  
MAY 4 - 1966  
CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor Sohio Petroleum Company  
Address Box 673, Russell, Kansas 67665

STATE OF KANSAS, COUNTY OF RUSSELL, ss.  
D. W. Smith (employee of owner) or former operator of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) *D. W. Smith*

Box 673, Russell, Kansas 67665 (Address)

SUBSCRIBED AND SWORN TO before me this 2nd day of May, 19 66

My commission expires November 18, 1967 *Deannal Becker* Notary Public.

150163-02086-0000

Sutor "B" Well No. 6

1270' E of W Line  
330' N of S Line of SW 1/4  
Section 12-1CS-20W  
Rooks County, Kansas

Contractor: The R. W. Rine Drilling Company  
Started: 11/30/50 Finished 12/12/50

LOG

Sand & Shale	0 - 285	
Shale (sticky)	285 - 307	
Shale & Shells	307 - 975	Syfo @ 500' - O.K.
Shale & Sand	975 - 1350	Syfo @ 1000' - O.K.
Shale & Shells	1350 - 1620	Syfo @ 1500' - O.K.
Anhydrite	1620 - 1665	
Shale & Shells	1665 - 2295	Syfo @ 2000' - O.K.
Shale & Lime	2295 - 2445	
Lime	2445 - 2820	Syfo @ 2500' - O.K.
Lime & Shale	2820 - 3474	
Lime	3474 - 3762	T.D.

Topo Heebner	3418
Lansing	3455
Conglomerate	3692?
Arbuckle	3754 (Corr.)
T.D.	3757

RECEIVED  
 CONSERVATION COMMISSION  
 APR 19 1963  
 CONSERVATION DIVISION  
 WASHINGTON, KANSAS

State of Kansas )  
County of Sedgwick ) ss.

I, E. H. Sloyer, do hereby certify that the above is a true and accurate log of the Sutor "B" Well No. 6, located 1270 E of W Line, 330' N of S Line of SW 1/4, Section 12-1CS-20W, Rooks County, Kansas.

E. H. Sloyer  
Secretary

Subscribed to and sworn before me this 15th day of December, 1950.

R. M. Green  
Notary Public

My Commission Expires December 29, 1952