


STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

WELL PLUGGING RECORD

NORTH

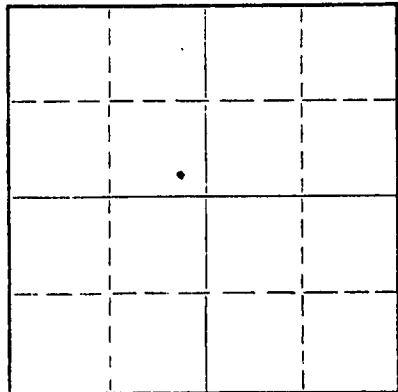

Locate well correctly on above
Section Flat

Rooks County. Sec. 5 Twp. 10 Rge. (E) 20 (W)
Location as "NE/CNW/SW" or footage from lines SE SE NW
Lease Owner The Bovaird Supply Company
Lease Name Renner Well No. 1
Office Address P.O. Box 2590, Tulsa, Oklahoma
Character of Well (completed as Oil, Gas or Dry Hole) oil
Date well completed 19
Application for plugging filed July 14 19 69
Application for plugging approved 19
Plugging commenced September 2 19 69
Plugging completed September 5 19 69
Reason for abandonment of well or producing formation depleted

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Leo Massey
Producing formation Depth to top Bottom Total Depth of Well 3840 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
		0	166'	8 5/8"	166'	none
		0	3834'	5 1/2"	3834'	327.16

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Sanded back from 3840' to 3800'. Ran 5 sacks of cement from 3800' to 3770'.
Filled hole with mud from 3770' to 700'. Set rock bridge from 700' to 685'. Filled with mud from 685' to 300'. Dumped 4 1/2 yards of ready mix cement from 300' to base of cellar.

RECEIVED
STATE CORPORATION COMMISSION
10-16-69
OCT 16 1969
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor PIPE PULLERS, INC.
Address Box 486, Ellinwood, Kansas

STATE OF Kansas COUNTY OF Barton, ss.
Evelyn Roth (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Evelyn Roth
Ellinwood, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 25th day of September 19 69

Serge A Meyer
Notary Public.

My commission expires Feb. 10, 1971

15-163-03143-0000

WELL LOG BUREAU - KANSAS GEOLOGICAL SOCIETY
412 Union National Bk. Bldg., Wichita, Kansas

COPY

Company - LION OIL COMPANY
Farm - Renner


No. 1

SEC. 5 T. 10 R. 20W
SE SE NW

Total Depth. 3840'
Comm. 9-13-48 Comp. 9-24-48
Shot or Treated. Acidized
Contractor. Glenn Paol Drlg. Co., Inc.
Issued. 12-4-48

County. Rooks

KANSAS



Elevation. _____

Production. Echo. Pot. 6500 bbls.

Figures Indicate Bottom of Formations.

surface clay	20
sand	40
shale & shells	890
sand	1060
shale & shells	1130
shale & sand	1525
shale & shells	1770
anhydrite	1810
shale & shells	2005
lime & shale	2685
shale & lime strks	2825
shale & lime	2885
lime	3020
lime & shale	3330
lime & shale strks	3410
lime & shale	3485
lime	3795
lime & chert	3815
lime & shale	3840
Total Depth	

Tops:	
Lansing	3524
Arbuckle	3833

Acidized w/500 Gals.
Swab 45 BOPH
Echo. Pot. 6500 BOPD

RECEIVED
STATE CORPORATION COMMISSION
JUL 16 1969
CONSERVATION DIVISION
Wichita, Kansas