


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 North Market, Insurance Bldg.
Wichita, Kansas

WELL PLUGGING RECORD

15-163-03578-0001

NORTH

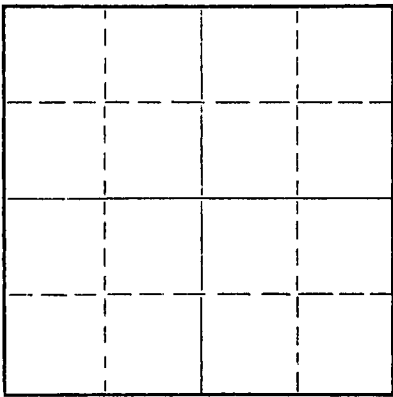

Locate well correctly on above
Section Plat

Rooks County. Sec. 7 Twp. 10 Rge. 20 (E) W (W)
Location as "NE/CNWxSWx" or footage from lines Sw/4 Sw/4 Ne/4
Lease Owner Noah & Gill
Lease Name Sauer Well No. 2
Office Address P.O. Box 1038, Wichita 1, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) _____
Date well completed _____ 19____
Application for plugging filed _____ 19____
Application for plugging approved _____ 19____
Plugging commenced 9-4-61 _____ 19____
Plugging completed 9-4-61 _____ 19____
Reason for abandonment of well or producing formation _____

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Eldon Petty
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3856 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	155'	None
				5 1/2	3852'	581'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Circulated 35 sacks drilling mud through tubing to 3800 feet.
Pulled Tubing. Pulled 5 joints 5 1/2 casing and circulated
25 sacks of mud to surface from 480 feet. Pumped 25 sacks
cement to 480 feet. Pulled rest of 5 1/2 casing. Pushed plug
to 40 feet and pumped 10 sacks cement to surface.

10-9-61
OCT 9 1961
CONSERVATION DIVISION
WICHITA, KANSAS

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Charlie Crow Drilling Co.
Address Hays, Kansas

STATE OF Kansas COUNTY OF Sedgwick ss.
Calvin Noah (employee of owner) or (owner or operator) of the above-described
well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the
above-described well as filed and that the same are true and correct. So help me God.

(Signature) Calvin Noah
Wichita, Kansas (Address)

SUBSCRIBED AND SWORN TO before me this 15th day of October, 19 61

My commission expires 11-30-61 James B. Kuyper Notary Public.

