

15-163-03289-0000

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bittig Building
Wichita, Kansas

Rooks County. Sec. 7 Twp. 10S Rge. 20 (E) (W)

Location as "NE/CNW&SW" or footage from lines. nw 1/4 nw 1/4 se 1/4

Lease Owner Cooperative Refinery Association

Lease Name Sauer Well No. 1

Office Address Box 765 Great Bend, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Oil

Date well completed November 18 19 51

Application for plugging filed January 26 19 55

Application for plugging approved January 28 19 55


Plugging commenced January 29 19 55

Plugging completed February 9 19 55

Reason for abandonment of well or producing formation Dry

If a producing well is abandoned, date of last production February 2 19 54

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

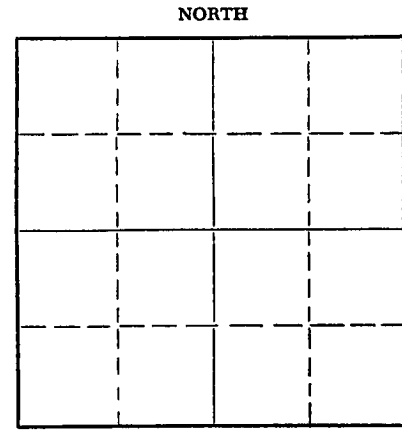

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Eldon Petty

Producing formation Arbuckle Depth to top _____ Bottom _____ Total Depth of Well 3860 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	197'	0
				5 1/2"	3855'	2078'9"

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

3860	----	3845'	Chat
3845	----	3805'	4 sacks cement
3805	----	195'	Mud
195	----	180'	Rock Bridge
180	----	135'	15 sacks cement
135	----	35'	Mud
35	----	25'	Rock Bridge
25	----	Top	10 sacks cement

2-17-55

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Betts Oil Field Service
Address Russell, Kansas

STATE OF KANSAS, COUNTY OF BARTON, ss.
Carl Sellers (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Carl Sellers

Box 765 Great Bend, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 14 day of February, 19 55

Donald E. Hunt

My commission expires August 17, 1957

Notary Public.

24-7388-5 3-53-20M

PLUGGING
FILE SEC 21 10 R 20W
BOOK PAGE 23 LINE 36

DRILLERS LOG


Sauer #1

Loc: NW-NW-SE
 Sec. 7-10S-20W
 Rocks County, Kansas
 Operator: Cooperative Refinery Ass'n.
 Contractor: Company Rig #5

Elevation: 2247' D.F.
 Casing: 8 5/8" @ 197' w/150 sx.
 5 1/2" @ 3855 w/75 sx.

Comm: 10-22-51 Comp: 11-19-51
 Total Depth: 3860'

<u>From</u>	<u>To</u>	<u>Formation</u>
0	175	Surface clay & blue shale
175	197	Blue shale
197	950	Shale, sand
950	1425	Shale, iron, sand
1425	1735	Sand, shale, anhydrite
1735	2230	Shale & anhydrite
2230	2345	Shale & lime
2345	2430	Shale & anhydrite
2430	3450	Shale & lime
3450	3735	Lime
3735	3790	Lime & shale
3790	3860	Cherty Lime
3860		R.T.D.



ROCKS COUNTY DIVISION
 MICHIGAN, KANSAS