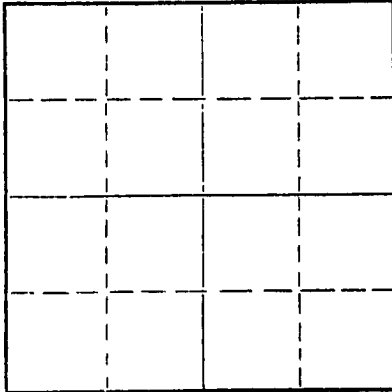


15-051-20836-00-00
WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas 67202

NORTH



Locate well correctly on above
Section Plat

ELLIS County. Sec. 16 Twp. 12S Rge. (E)17 (W)
Location as "NE/CNW/SW" or footage from lines SW SE SE
Lease Owner ALPINE DRILLING CO. INC.
Lease Name SCHMEIDLER Well No. 1
Office Address 800 Biting Building, Wichita, Kansas 67202
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed 7/22 19 72
Application for plugging filed 7/22 19 72
Application for plugging approved 7/22 19 72
Plugging commenced 7/22 19 72
Plugging completed 7/22 19 72
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well LEO MASSEY
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3746 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Surface		0	213	8 5/8	213	none

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

1st Plug @ 600' w/70sxs
2nd Plug @ 210' w/20 sks
3rd Plug @ 40' w/ 1/4 sks Halls and plug w/ 10 sks
Bridge rathole w/2 sks

RECEIVED
STATE CORPORATION COMMISSION
7-29-1972
JUL 26 1972
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor GABBERT-JONES, INC.
Address 830 Sutton Place, Wichita, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.
GABBERT-JONES INC (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Jack W. Gabbert
830 Sutton Place, Wichita, Kansas
(Address)

25 day of July 19 72



My commission expires Nov. 29, 1975

Marjorie Hall Notary Public.

15-051-20836-00-00

GABBERT-JONES, INC.
WICHITA, KANSAS
DRILLERS' WELL LOG

RECEIVED
STATE CORPORATION COMMISSION
7-26-1972
26 1972
CONSERVATION DIVISION
Wichita, Kansas

SCHMEIDLER #1
SW SE SE, Section 16-12S-17W
Ellis County, Kansas


Commenced: July 14, 1972
Completed: July 22, 1972

OPERATOR: ALPINE DRILLING CO. INC.

Depth		Formation	Remarks
From	To		
0	55	Topsoil - rock	Ran 5 double joints of used
55	100	Rock-Shale	28# 8 5/8" csg. set @ 213'
100	213	Blue Shale	cemented w/125 sks common 2% Gel
213	580	Shale	3% CC P.D. @ 2:45 PM 7/14/72
580	760	Sand	Cement Circ. Job by Allied
760	795	Pyrite-sand-shale-shells	
795	800	Pyrite-sand	
800	1015	Sand	
1015	1358	Shale-redbed	
1358	1404	Anhydrite	
1404	2165	Shale-Shells	
2165	2750	Shale-Lime	
2750	3365	Lime-Shale	
3365	3640	Lime	
3640	3734	Cong.	
3734	3746	Lime (Arb.)	
3746	TD		DRY AND ABANDONED


I, James S. Sutton, II, certify this is a correct copy of the Drillers' Log for above described well, to the best of my knowledge and belief.

STATE OF KANSAS)
) SS
COUNTY OF SEDGWICK)


James S. Sutton, II

Before me, the undersigned, a Notary Public within and for said County and State, on this 25th day of July, 1972, personally appeared James S. Sutton, II, to me personally known to be the identical person who executed the within and foregoing instrument and acknowledged to me that he executed the same as his free and voluntary act and deed for the uses and purposes therein set forth.

IN WITNESS WHEREOF, I have hereunto set my hand and official seal the day and year last above written.


Marjorie Hall, Notary Public

