


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bitting Building
Wichita, Kansas

NORTH

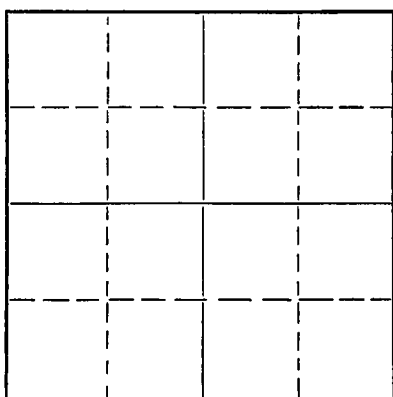

Locate well correctly on above
Section Plat

Ellis County, Sec. 30 Twp. 12 Rge. 17 (E) W (W)
Location as "NE/CNW $\frac{1}{4}$ /SW $\frac{1}{4}$ " or footage from lines NE SE SW
Lease Owner B & R Drilling, Inc.
Lease Name Staab Well No. 1
Office Address Russell, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed 2/6/52 19
Application for plugging filed 2/4/52 19
Application for plugging approved 2/4/52 19
Plugging commenced 2/5/52 19
Plugging completed 2/5/52 19
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Eldon Petty
Producing formation Depth to top Bottom Total Depth of Well 3725 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
				8 5/8	154	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

PLUGGING RECORD

Fill with heavy mud to 154', set wooden plug, 15 sacks cement mixed and poured through drill pipe. Fill with heavy mud to 40' from bottom of cellar set wooden plug (tie to surf pipe) 10 sacks cement & 1/2 sack hulls.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor
Address
2-15-1956


STATE OF KANSAS, COUNTY OF RUSSELL, ss.
W. A. Michaelis, Jr. (employee of owner) or (owner or operator) of the above-described well,
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) W. A. Michaelis, Jr.
Russell, Kansas (Address)

SUBSCRIBED AND SWORN to before me this 13th day of February, 1952

Notary Public

My commission expires 6-17-54



15-051-00098-00-00

B & R Drilling, Inc.
Staab #1

NE SE SW of Sec. 30-12-17
Ellis County, Kansas

Total Depth: 3725'
Comm. 1/23/52
Comp. 2/6/52

Casing

8 5/8" Set @ 154

Cement

130 sacks Lone Star

Formation	Depth
Post rock	20
Shale-shells	120
Shale	620
Sand	690
Shale-shells	768
Iron-hard sand	805
Shale-sand	1075
Red bed-shale	1145
Anhydrite	1170
Shale	1240
Shale-shells	1350
Anhydrite	1390
Shale-lime	1470
Red bed-shale-shells	1710
Shale-shells	1912
Shale-lime	3289
Lime	3327
Lime-shale	3408
Lime K.C.	3438
Lime	3626
Lime-shale	3653
Conglomerate	3700
Arb.	3725'

STATE OF KANSAS)
) ss
RUSSELL COUNTY)

I hereby certify that the above information is true and correct to the best of my knowledge.

Car. Butz

2-15-1952

Subscribed and sworn to before me this 13th day of February, 1952.

Wm. L. Sumner

Notary Public

My commission expires: 6-17-54.

DRILLING
FILE NO. 30-12-17-170
PAGE 21