


15-051-20386-00-00
WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

NORTH

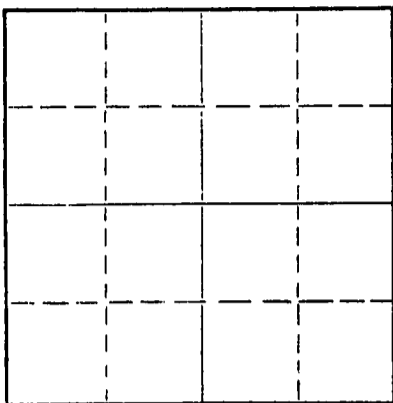

Locate well correctly on above
Section Plat

Ellis County. Sec. 20 Twp. 12SRge. 18 (E) W (W)
Location as "NE/CNW%SW%" or footage from lines SW NW SW
Lease Owner A. Ainsworth
Lease Name Evans Well No. 1
Office Address 222 Brown Building, Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) D&A
Date well completed February 2, 19 69
Application for plugging filed February 2, 19 69
Application for plugging approved February 2, 19 69
Plugging commenced February 2, 19 69
Plugging completed February 2, 19 69
Reason for abandonment of well or producing formation D&A

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was com-
menced? Yes

Name of Conservation Agent who supervised plugging of this well Leo F. Massey
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3773' Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	205'	-0-

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Set plug w/ 70 sx cement
@ 660', 20 sx @ 210',
1/2 sx hulls & 10 sx
cement @ 40' to surface
All cement 50-50 poz.,
2% gel.

RECEIVED
STATE CORPORATION COMMISSION
MAR 18 1969
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Red Tiger Drilling Company
Address 1720 Wichita Plaza, Wichita, Kansas 67202

STATE OF Kansas, COUNTY OF Sedgwick, ss.
Norman E. Klein (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.


(Signature) Norman E. Klein
1720 Wichita Plaza, Wichita, Kansas
(Address)

SUBSCRIBED AND SWORN to before me this 6th day of February, 1969

Gloria Sawcett

Notary Public.

My commission expires 10-25-72



RECEIVED
STATE CORPORATION COMMISSION
3-12-1969
MAR 12 1969
CONSERVATION DIVISION
Wichita, Kansas

DRILLERS LOG

No. 1 Evans

CASING RECORD:	COMPANY:	A. Ainsworth	DESCRIPTION:
8 5/8" @ 213' w/145 sx cement	CONTRACTOR:	Red Tiger Drilling Co.	SW NW SW 20-12S-18W Ellis County, Kansas
	COMMENCED:	January 27, 1969	
	COMPLETED:	February 2, 1969	
TOTAL DEPTH: 3773'			ELEVATION:

<u>FORMATION</u>	<u>FROM</u>	<u>TO</u>	<u>REMARKS</u>
Post Rock, Clay	0	150	
Shale	150	1495	
Anhydrite	1495	1532	
Shale	1532	1780	
Shale & Lime	1780	2975	
Lime	2975	3773	

I certify that this is a true and correct copy of the above log to the best of my knowledge.

RED TIGER DRILLING COMPANY

Norman E. Klein
Norman E. Klein

Subscribed and sworn to before me this 6th day of February, 1969.



Gloria Fawcett
Notary Public

My Commission Expires:
10-25-72