

15-163-02096-0000

Orig - State Corp. Comm. ✓
Copy - B. A. Conner - 357 FPB
Copy - Mary Crump - Okla. City
Copy - Well File

STATE OF KANSAS
STATE CORPORATION COMMISSION
200 Colorado Derby Bldg.
Wichita, Kansas 67202

Form CP-4
Rev. 12-15-80

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit

COUNTY Rooks SEC. 13 TWP. 10 RGE. 20 X&W
Location as in quarters or footage from lines:
2260' FNL & 333' FEL of NE/4

Locate Well
correctly on above
Section Platt.

Lease Owner Phillips Petroleum Company
Lease Name Earl-C Well No. 9
Office Address Box 287, Great Bend, Kansas 67530
Character of Well (Completed as Oil, Gas or Dry Hole): Oil
Date Well Completed November 1950
Application for plugging filed August 11, 1982
Plugging commenced January 13, 1983
Plugging completed January 26, 1983
Reason for abandonment of well or producing formation Uneconomical

Was permission obtained from the Conservation Division or it's
Agent's before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Dennis Hamel
Producing formation LKC Depth to top 3456 bottom 3629 T.D. 3695
Show depth and thickness of all water, oil and gas formations. 3774

OIL, GAS OR WATER RECORDS RTKCC
Casing Record

Formation	Content	From	To	Size	Put in	Pulled Out
Surface	Water	0	244	8 5/8	244	-0-
Production	Oil & water	0	3774	5 1/2"	3774	727.54'


Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set. MIRU Kelso Casing Pullers, Fill 5 1/2" csg w/sand to 3625'. Spot 25 sx cmt on top of sand w/bailer. Pull 7" stretch - shot pipe @ 2718', 2290, 2024, 1518, 1414, 1219, 1021 826, 733 - came loose. Pull 7 LD 22 jts (727.54). RU Sun Oilwell Cmtg to 8 5/8" & pmpd 200 sx cmt. w/2 sx hulls, 2 sx hulls, 8 sx gel and 50 sx cmt. (all cmt 50-50 Poz w/6% gel). Max press 500#. ISIP - 300#. Top out w/cmt. Weld on plate. WELL P&A 1-26-83

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Kelso Casing Pullers Inc.
Chase, Kansas

STATE OF Kansas COUNTY OF Barton, ss.
C. D. Dohrer (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) C. D. Dohrer Area Mgr.
Box 287, Great Bend, Kansas 67530
(Address)



SWORN TO before me this 27th day of January, 19 83


Velma L. Mog
Notary Public.

My Commission expires: February 15, 1984

RECEIVED
STATE CORPORATION COMMISSION
01-28-83
JAN 28 1983
CONSERVATION DIVISION
Wichita, Kansas

15-163-02096-0000

(For use in Kansas only for reporting Form 4 and 5)

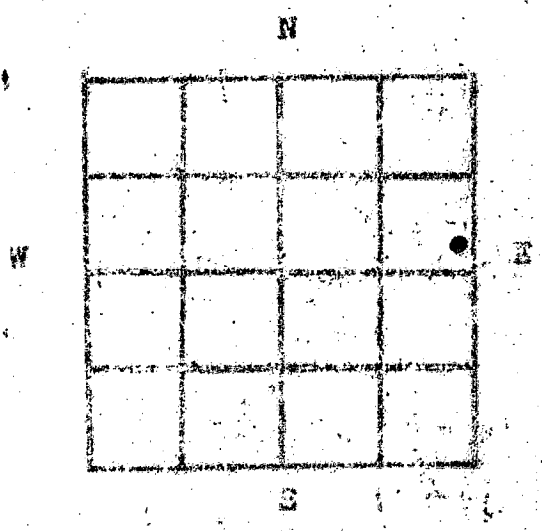

COUNTY Roos SEC 13 TWP. 108 RGE 30W
 COMPANY OPERATING Chasplin Refining Company
 OFFICE ADDRESS Box 552, Hail, Oklahoma
 FARM NAME Earl WELL NO. 19
 WELL LOCATED NE/4 SE/4 NE/4 --- 2260' from N. Line and 333' from E. Line
 CHARACTER OF WELL Oil

DRILLING COMMENCED October 24, 1950 DRILLING COMPLETED November 5, 1950

Size	Weight	Colls	Makes	Feet	Amount Pulled	Remarks
8-5/8"	244	8 rd.	National	244'	none	150 sacks
5-1/2"	144	8 rd.	National	3774'	none	175 sacks

FORMATION RECORD

	<u>TOPS</u>	<u>BOTTOM</u>
sand-shale	0	245
shale-shells	245	550
shale-sand-shells	550	1310
shale-sand-anhy-red bed	1310	1630
anhy-shale-salt-shells	1630	1965
shale-lime-shells	1965	2160
lime-shale	2160	3215
broken lime	3215	3300
lime	3300	3405
lime-shale	3405	3441
lime	3441	3710
lime-shale-cong.	3710	3748
coring	3748	3756
coring-lime	3756	3762
coring	3762	3768
lime	3768	3774 T.D.

FORMATION TOPS

- 3246- Topeka
- 3418- Heebner
- 3468- Lansing
- 3688- Socy Conglomerate
- 3730- Simpson
- 3754- reworked arbuckle
- 3766- arbuckle

Elevation: 2226 D.F.

RECEIVED
STATE CORPORATION COMMISSION

AUG 12 1982

CONSERVATION DIVISION
Wichita, Kansas

L. C. Wentworth
Superintendent

sworn to before me
20th of November 1950

Peggy Golen

May 19, 1951