

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202


Rooks County, Sec. 13 Twp. 10S Rge. 20 E/W
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines

NE NW SE
Lease Owner Sohio Petroleum Company
Lease Name Sutor "A" Well No. 8
Office Address Box 673, Russell, KS 67665
Character of Well (Completed as Oil, Gas or Dry Hole)

oil
Date Well completed October 3 1950
Application for plugging filed August 21 1978
Application for plugging approved August 22 1978
Plugging commenced September 18 1978
Plugging completed September 30 1978
Reason for abandonment of well or producing formation

depleted
If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

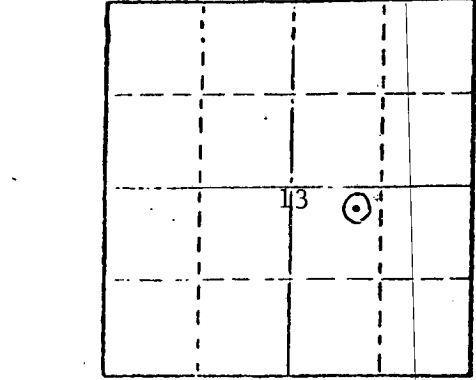

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Leo Massey
Producing formation Depth to top Bottom Total Depth of Well 13753'
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	1640'	None
				5-1/2"	3749'	2818'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Sanded back to 3400', dumped 5 sx cement to 3360'. Shot at 2817', pipe free.
Pulled 87 jts. Plugged well with 20 sx gel, plug, 50 sx 50-50 Poz plus 2% gel, 8 sx gel, 25 sx 50-50 Poz plus 2% gel. Well plugged at 2:45 p.m., 9-30-78.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Kelso Casing Pulling

STATE OF KANSAS COUNTY OF RUSSELL, ss.


W. H. Ward (employee of owner) or ~~XXXXXXXXXXXXXXXXXXXX~~
of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) W. H. Ward
Box 673, Russell, KS 67665
(Address)

SUBSCRIBED AND SWORN TO before me this 17th day of October, 19 78

My appointment expires 9-28-79

Juanita Valentine
Juanita Valentine Notary Public.



RECEIVED
STATE CORPORATION COMMISSION
10-18-78
OCT 18 1978
CONSERVATION DIVISION
Wichita, Kansas

Sutor "A" Well No. 8

NE NW SE
Sec. 13-108-20W
Rooks County
Kansas

Contractor: The R. W. Rine Drilling Company
Started: 9/9/50 Finished: 9/24/50
Elevation: 2209'

Clay - Sand	0 - 180	Syfe @ 500' - 1°
Sand - Shale - Shells	180 - 330	
Shale - Shells	330 - 725	
Sand - Shale - Shells	725 - 1315	Syfe @ 1000' - 1°
Shale Shells	1315 - 1625	
Anhydrite	1625 - 1644	Syfe @ 1600' - 1°
Cement	1590 - 1644	3 5/8" @ 1635' w/ 800 SX.
Anhydrite	1644 - 1660	
Shale - Shells	1660 - 2100	Syfe @ 2000' - 1°
Shale - Lime	2100 - 2975	Syfe @ 2500' - 0° K.
Shale	2975 - 3065	Syfe @ 3000' - 1°
Shale - Broken Lime	3065 - 3200	
Shale - Lime	3200 - 3280	
Lime	3280 - 3660	
Lime & Conglomerate	3660 - 3710	
Conglomerate - Arbuckle Shale	3710 - 3751	
Arbuckle	3751 - 3753	5 1/2" Casing 3749' w/ 150 SX.

Tops	Anhydrite	1625
	Heebner	3411
	Lansing	3447
	Arbuckle	3748
	T.D.	3751

State of Kansas)
County of Sedgwick) ss.

I, E. H. Sloyer, do hereby certify that the above is a true and accurate log of the Sutor "A" Well No. 8 located in the NE NW SE of Section 13-108-20W, Rooks County, Kansas.

E. H. Sloyer
Secretary

Subscribed to and sworn before me this 29th day of September, 1950

R. M. Green
Notary Public

My commission expires Dec. 29, 1952

Open Hole: 3749-53' (Arbuckle)

PBTD: 3740' CIBP

Open Perforations: 3640-42', 3622-24', 3604-06', 3582-88', 3552-54',
3544-46', 3534-36', 3503-05', 3489-91' (LKC)

2 7/8" tubing in well at 3676'

RECEIVED
STATE CORPORATION COMMISSION

AUG 22 1978

CONSERVATION DIVISION
Wichita, Kansas