

15-16J-03531-0000

STATE OF KANSAS  
STATE CORPORATION COMMISSION

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
211 No. Broadway  
Wichita, Kansas

WELL PLUGGING RECORD

Rocks \_\_\_\_\_ County. Sec. 13 Twp. 10 Rge. \_\_\_\_\_ (E) 20 (W)

Location as "NE/CNWxSWx" or footage from lines SW SW SE

Lease Owner Sohio Petroleum Company

Lease Name Sutor A Well No. 4

Office Address Russell, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Oil

Date well completed 10-4 19 49

Application for plugging filed 12-11 19 56

Application for plugging approved 12-13 19 56


Plugging commenced 12-18 19 56

Plugging completed 12-23 19 56

Reason for abandonment of well or producing formation Uneconomical

If a producing well is abandoned, date of last production 12-12 19 56

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

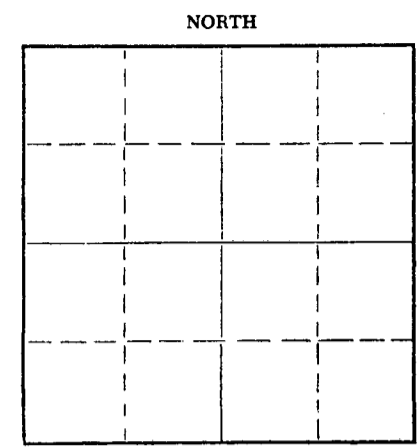

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Eldon Petty

Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 3734 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8	1605'	None
				5-1/2	3730'	<del>2889'</del>

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

3734 to 3406' - Sand and 1 Sacks Cement  
3406' to 35' - Heavy Mud  
35' to Cellar - 10' Rock Bridge and 10 Sacks Cement

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor R & D Casing Pulling Co.  
Address Great Bend, Kansas

STATE OF Kansas COUNTY OF Russell, ss.  
J. H. Bond (employee of owner) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) J. H. Bond

(Address) \_\_\_\_\_

SUBSCRIBED AND SWORN TO before me this 26th day of December, 19 56

January 24, 1959

Benedict B. Brown COMMISSION

Notary Public.



DEC 23 1956  
12-28-56  
CONSERVATION DIVISION  
Wichita, Kansas

PLUGGING  
FILE SEC 13 T. 10 R. 20 W  
BOOK PAGE 125 LI E 21

WELL LOG

Operator:	Sohio Petroleum Company	Farm Name:	Sutor #4
Location:	SW SW SE Sec. 13-10-20	County:	Rooks
Pool Name:	Berland	State:	Kansas
Commencement Date:	9-9-49	Completion Date:	9-22-49

<u>FROM</u>	<u>TO</u>	<u>FORMATION</u>	<u>REMARKS</u>
0	40	Surface	
40	190	Sand, shale	
190	795	Shale, shells	
795	855	Sand, shale	
855	950	Shale	Sypho, 900' - 0°
950	985	Pyrite, sand	
985	1290	Sand	
1290	1350	Red bed	
1350	1585	Red bed, shale, shells	Sypho, 1500' - 1°
1585	1590	Shale, shells	
1590	1605	Anhydrite	8-5/8" w/800 sx. 1605'
1585	1605	Cement	
1605	1630	Anhydrite	
1630	2080	Red bed, shale, shells	Sypho, 2000' - 1°
2080	2200	Shale	
2200	2660	Lime	Sypho, 2500' - 1°
2660	2705	Shale, shells	
2705	2905	Shale, lime	
2905	3125	Shale, shells	Sypho, 3000' - 1°
3125	3220	Shale, lime	
3220	3355	Lime	
3355	3430	Shale, lime	
3430	3595	Lime	DST @ 3474' & 3446'
3595	3601	Lime, chert	Open 1 hr. Closed
3601	3705	Lime	10 min. 60' R. Mud
3705	3734 TD	Sand, lime	5 1/2" w/150 sx.

**RECEIVED**  
 STATE CORPORATION COMMISSION  
 DEC 12 1949  
 CONSERVATION DIVISION  
 Wichita, Kansas

**PLUGGING**  
 FILE SEC. 13 T. 10 R. 20w  
 BOOK PAGE 125 LINE 21