


STATE OF KANSAS
STATE CORPORATION COMMISSION

15-051-04192-00-00
WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bitting Building
Wichita, Kansas

Ellis County, Sec. 15 Twp. 12 Rge. 18 (E) (W)

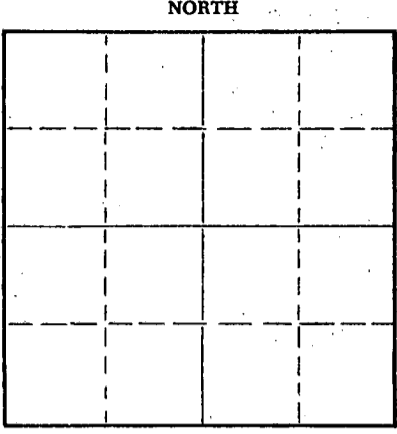

Location as "NE/CNW/SW" or footage from lines NE NE SE
Lease Owner Carl Lebsack
Lease Name Byers Well No. 4
Office Address Box 479, Hays, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed October 10, 1955 19
Application for plugging filed October 10, 1955 19
Application for plugging approved October 10, 1955 19
Plugging commenced October 10, 1955 19
Plugging completed October 10, 1955 19
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Eldon Petty
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3718' Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
	Surface Pipe	0	143'	8-5/8"	143'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Filled hole with heavy mud to 140'
Bridged hole at 140'. Ran 20 sacks
cement 140' up. Bridge hole at 40',
ran 10 sacks cement. Plug 40' to
base of cellar.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Isern Drilling Company
Address Box 45, Ellinwood, Kansas


STATE OF KANSAS COUNTY OF BARTON
I, M. M. Shropshire (employee of owner) or owner or operator of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) M. M. Shropshire
Lyons, Kansas (Address)

SUBSCRIBED AND SWORN TO before me this 11th day of October, 19 55

My commission expires Feb. 10, 1959.

George A. Meyer Notary Public.



10-14-1955
PLUGGING
FILE SEC 15 T 12 R 18 W
BOOK PAGE 8 LINE 10

15-051-04192-00-00

WELL LOG

Carl Lebsack, Owner - Byers No. 4
NE/4 NE/4 SE/4 Section 15, Township 12, Range 18W,
Ellis County, Kansas

ELEVATION: 2150 DF

Figures indicate bottom of formation
0 to 65 lime

143 shale
490 shale & shells
580 sand
640 shale & shells
820 sand
910 shale & shells
1075 sand
1406 shale & shells
1435 Anhydrite
1790 shale & shells
1900 salt
2055 shale & shells
2500 lime & shale
3155 shale & shells
3255 lime & shale
3351 lime
3354 Heebner
3677 lime
3718 Arbuckle
3718 Rotary Total
Depth D&A

PIPE RECORD:

8-5/8" set at 143'
Cemented with 125 sacks.

Rotary Commenced 10-1-55
Completed 10-10-55

STATE OF KANSAS)
COUNTY OF BARTON) SS

I, M. M. Shropshire, Drilling Superintendent of the above-described well, being first duly sworn on oath, declare: That I have knowledge of the facts, statements and matters herein contained pertaining to the log of the above-described well, as filed, and that the same are true and correct.

RECEIVED
OCT 11 1955
10-14-1955

M. M. Shropshire

Subscribed and Sworn to before me this 11th day of October, 1955.

George A. Meyer
Notary Public



PLUGGING
FILE SEC 15 T 12 R 18W
BOOK PAGE 8 LINE 10