


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Ellis County. Sec. 23 Twp. 12 Rge. 20 ~~E~~/W
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines

SE/SE/SE
Lease Owner Frontier Oil Company
Lease Name Staab Well No. 1
Office Address 1437 N. Franklin, Russell, KS 67665
Character of Well (Completed as Oil, Gas or Dry Hole)

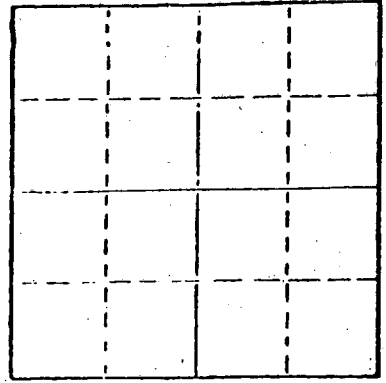

Locate well correctly on above
Section Plat

Oil
Date Well completed 19
Application for plugging filed 19
Application for plugging approved 19
Plugging commenced September 22 1978
Plugging completed September 29 1978
Reason for abandonment of well or producing formation
Depleted

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Leo Massey
Producing formation Depth to top Bottom Total Depth of Well 3896'
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	284'	NONE
				4 1/2"	3883'	3056.26'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Dumped sand to 3775' and four (4) sacks cement
Shot casing at 3100'
Pulled 90 joints of 4 1/2" casing
Plugged well with three (3) sacks hulls in 20 sacks gel, 70 sacks 50/50 pozmix cement with 2% added gel, eight (8) sacks gel and 70 sacks 50/50 pozmix cement with 2% added gel. Shut in pressure 300 psi.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Rockhold Engineering, Inc.

STATE OF Kansas COUNTY OF Barton, ss.
James W. Rockhold (employee of owner) or (owner or operator)
of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) James W. Rockhold
James W. Rockhold Box 698, Great Bend, KS
(Address) 67530

SUBSCRIBED AND SWORN TO before me this 3rd day of October, 1978.

STATE NOTARY PUBLIC
KANSAS
CATHY L. COLE
Barton County, Kansas
My Appt. Exp. June 14, 1982

Cathy L. Cole
Notary Public.

My commission expires

RECEIVED
STATE CORPORATION COMMISSION
10-4-1978
OCT - 4 1978

CONSERVATION DIVISION
Wichita, Kansas

DRILLERS LOG

SEP 14 1978

No. 1 Staab

CASING RECORD:

COMPANY: Frontier Oil Company

DESCRIPTION:

8 5/8" @ 284'
w/165 sx cement

CONTRACTOR: Red Tiger Drilling Company

SE/4 SE/4 SE/4
Sec. 23-T12S-R20W
Ellis County, Kansas

4 1/2" @ 3,883'
w/200 sx cement

COMMENCED: December 30, 1977

COMPLETED: January 19, 1978

TOTAL DEPTH: 3,896'

ELEVATION: 2,198' KB

FORMATION	FROM	TO	REMARKS
Rock	0	12	
Shale	12	810	
Shale & Sand Streaks	810	1010	
Sand	1010	1246	
Red Bed	1246	1559	
Anhydrite	1559	1597	
Shale	1597	2110	
Lime & Shale	2110	3268	
Lime	3268	3896	
RTD		3896	

RECEIVED
STATE CORPORATION COMMISSION
9-29-1978
SEP 29 1978
CONSERVATION DIVISION
Wichita, Kansas

I certify that this is a true and correct copy of the above log to the best of my knowledge.

RED TIGER DRILLING COMPANY

Gloria Fawcett
Gloria Fawcett

Subscribed and sworn to before me this 25th day of January, 1978.

Joyce A. Hagermann
Notary Public

