


15-163-03333-0000

STATE OF KANSAS  
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
800 Bittig Building  
Wichita, Kansas

Rooks County. Sec. 16 Twp. 10S Rge. (E) 20 (W)  
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines S/2 NW/4 NW/4  
Lease Owner Heathman Drilling Co., Inc.  
Lease Name WILLIAMS Well No. 3  
Office Address 509 Orpheum Bldg., Wichita, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole) dry hole  
Date well completed 2-27-1951  
Application for plugging filed verbal 2-27-1951  
Application for plugging approved 2-27-1951  
Plugging commenced 2-27-1951  
Plugging completed 2-27-1951  
Reason for abandonment of well or producing formation

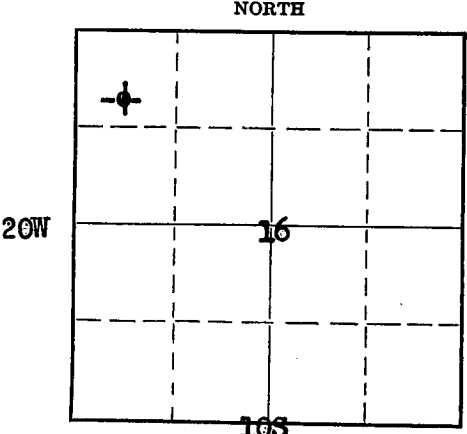

If a producing well is abandoned, date of last production  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Eldon Petty, Hays, Kansas  
Producing formation none Depth to top Bottom Total Depth of Well 3881 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
none				8-5/8"	125'	none
				w/100 sacks cement and 1 sack Cal. Chloride		

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Plugged hole, w/plug @ 120' w/100 sacks cement; surface casing cut off 3' below level of ground.

RECEIVED  
MAR - 3 1951  
CONSERVATION DIVISION  
WICHITA, KANSAS

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to Heathman Drilling Co., Inc.  
Address 509 Orpheum Building, Wichita, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss.  
Robert F. Walters (employee of owner)


being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God. HEATHMAN DRILLING CO., INC.

(Signature) By: Robert F. Walters  
509 Orpheum Bldg., Wichita, Kansas (Address)

SUBSCRIBED AND SWORN to before me this 2nd day of March, 1951

My commission expires June 28, 1952.

D. Majorie Matt Notary Public.



PLUGGING  
FILE SEC 16T 10 R 20W  
BOOK PAGE 64 LINE 33

WILLIAMS # 3 WELL

Location: C. S/2 NW/4 NW/4 Sec. 16-108-20W  
Reeks County, Kansas

Date Spudded: 2-17-51

Date Completed: 2-27-51

Operator: Heathman Drilling Co., Inc.

Total Depth: 3881'

Contractor: Heathman Drilling Co., Inc.

Elevation: 2245' Gr

Surface casing: 129.38' of 8-5/8" set  
@ 125' w/100 sacks and  
1 sack Cal. Chloride

2247' LF

2249' KB

Oil Strings: None run -  
Dry and abandoned - 2-27-51

T O P S (KB)

Anhydrite	1731 (+ 518)
Heebner	3496 (-1247)
Lansing-Kansas City	3535 (-1286)
Base of Kansas City	3760 (-1511)
Shale Conglomerate	3795 (-1546)
White Chert Conglomerate	3833 (-1584)
No Simpson	
Arbuckle	3876 (-1627)
Rotary Total Depth	3881 (-1632)

L O G

(Figures indicate bottom of formation.)

Sand and shale	0 to 125
Cement, sand and shale	210
Sand and shale	685
Sand and shale	1731
Anhydrite	1766
Shale	1805
Shale and shells	2605
Lime and shale	2227
Shale and shells	2485
Shale and lime	2917
Shale	3025
Shale and lime	3534
Lime	3587
Lime and shale	3648
Lime	3701
Lime and shale	3802
Conglomerate	3840
Cherty shale and lime	3881
Total Depth	3881'

**RECEIVED**  
STATE CORPORATION COMMISSION  
MAR - 3 1951  
CONSERVATION DIVISION  
Wichita, Kansas

The undersigned, Robert F. Walters of the Heathman Drilling Co., Inc., hereby certifies that the above is a true and correct log of the formations encountered in drilling the Williams #3 well as shown on the daily drilling reports.

**PLUGGING**  
FILE SEC 16 T 10 R 20 W  
BOOK PAGE 64 OF 33

*Robert F. Walters*  
Robert F. Walters

Subscribed and sworn to before me  
this 2nd day of March 1951.

*D. Marjorie Mott*  
Notary Public

My commission expires: June 28, 1952.