
15-051-30395-00-00

KANSAS

Form CP-3 Rev. 6-4-68

STATE CORPORATION COMMISSION

J. Lewis Brock Administrator 500 Insurance Building Wichita, Kansas 67202

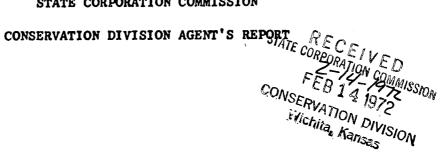

Operator's Full Name Leo J. Dreiling Oil Co.	
Complete Address R. R. #2 Victoria	
Lease Name Baker	Well No. 1
Location NE SW SE	Sec. 10 Twp. 12 Rge. (E) (W) 18
CountyEllis	Total Depth 3712
Abandoned Oil Well XX Gas Well Input Well SWD Well D & A	
Other well as hereafter indicated	
Plugging Contractor Glenn & Smith Pipe Pulling	
Address Box 156 Ellinwo	ood, Kansas 67526License No. 396
Operation Completed: Hour 11 A Da	ay 12 Month 2 Year 1972
The above well was plugged as follows:	
Total Depth 3712 8 5/8 csg set at 123 cwc 100 sk.	
5½ csg set at 3696° cw 75 sk cmt.	
Filled $5\frac{1}{2}$ csg W/sd (3680-3712) Dumped 5 sk cmt W/dump bailer. (3645-3680)	
Cutoff and recovered 2200° of $5\frac{1}{2}$ csg.	
Pumped down 8 5/8 csg with 20 sk gel & water W/300 lbs hulls, -70 sk 50-50 poz cmt	
6% gel, -5 sk gel & water, released 8 5/8 plug and pumped 70 sk 50-50 poz cmt	
W/6% gel. 200 lbs SI pres.	
I hereby certify that the above well was plugged as herein stated.	
INVOICED	Signed: Las & Marries
2/14/72-	Well Plugging Supervisor