


Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
211 No. Broadway  
Wichita, Kansas

### WELL PLUGGING RECORD

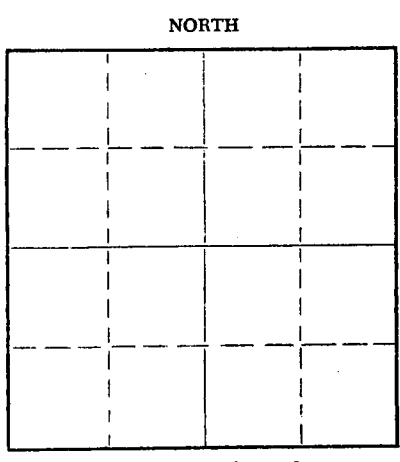

Locate well correctly on above Section Plat

Rooks County, Sec. 14 Twp. 10S Rge. 20 (W)  
 Location as "NE/CNW/SE" or footage from lines C SE/SE  
 Lease Owner I.O. Miller Oil Co.  
 Lease Name Miller-Sutor Well No. #8  
 Office Address Box 274, Ellis, Kansas  
 Character of Well (completed as Oil, Gas or Dry Hole) \_\_\_\_\_  
 Date well completed \_\_\_\_\_ 19\_\_\_\_  
 Application for plugging filed Yes 19\_\_\_\_  
 Application for plugging approved Yes 19\_\_\_\_  
 Plugging commenced 4-22 19 59  
 Plugging completed 4-25 19 59  
 Reason for abandonment of well or producing formation \_\_\_\_\_

If a producing well is abandoned, date of last production \_\_\_\_\_ 19\_\_\_\_  
 Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Mr. Eldon Petty  
 Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 3789' Feet  
 Show depth and thickness of all water, oil and gas formations.

#### OIL, GAS OR WATER RECORDS

#### CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	Surface	
				5 1/2"		3,020'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Measured into T.D. 3789'.  
 Plugging started 4-22-59. Finished 4-25-59.  
 Plugged off bottom and sanded to 3770'. Dumped 4 sacks of cement.  
 Worked and shot pipe. Shot 5 1/2" casing at 3,020'. Pulled pipe out of hole and plugged well as follows: Pumped in 40 sacks of mud at 600' and dumped 20 sacks of cement. Pulled pipe to 150' and pumped in 20 sacks of cement. capped well with 10 sacks of cement on top. Well completed.


**RECEIVED**  
 STATE CORPORATION COMMISSION  
 4-30-1959  
 APR 30 1959  
 CONSERVATION DIVISION  
 Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)  
 Name of Plugging Contractor J.O. Forbes d/b/a Forbes Casing Pulling Co.  
 Address Box 221, Great Bend, Kansas

STATE OF Kansas, COUNTY OF Barton, ss.  
J.O. Forbes (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) J.O. Forbes  
Box 221, Great Bend, Kansas (Address)

SUBSCRIBED AND SWORN TO before me this 28th day of April, 1959  
Betty S. Edman Notary Public.  
 My commission expires November 8, 1960



**PLUGGING**  
 FILE SEC. 14 T. 10 R. 20W  
 BOOK PAGE 32 LINE 39

WELL LOG

I.O. MILLER OIL COMPANY, ELLIS KANSAS  
#8 Miller-Sutor

Elevation: 2218' R.B.  
Rotary T.D.: 3789' in Arb.

C SE SE Section 14 T10S R20W  
Rooks County, Kansas  
Development well

CASING RECORD:

8 5/8" @ 227' w/125 sax  
5 1/2" @ 3783'

Commenced: 1-10-56  
Completed: 1-20-56

I.P.: Pending

SUMMARY OF FORMATIONS

HEEBNER	3440'	(-1222)
Toronto	3462'	(-1244)
Lansing	3477'	(-1259)
Base of K.C.	3693'	(-1475)
Conglomerate	3717'	(-1499)
Simpson	3737'	(-1519)
Arbuckle	3779'	(-1561)
Rotary T.D.	3789'	(-1571)

RECEIVED  
STATE CORPORATION COMMISSION  
4-21-1959  
APR 21 1959  
CONSERVATION DIVISION  
Wichita, Kansas

PLUGGING  
FILE SEC. 14 T10 R20W  
BOOK PAGE 32 LINE 39