

STATE OF KANSAS
STATE CORPORATION COMMISSION


Form CP-4

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

Rooks County, Sec. 14 Twp. 10 Rge. 20 (E) (W) X

Location as "NE/CNW/SW" or footage from lines NW SW SE
Lease Owner I. O. Miller
Lease Name Miller-Sutor Well No. 9
Office Address 619 Brown Building Wichita, Kansas 67202
Character of Well (completed as Oil, Gas or Dry Hole)
Date well completed 19____
Application for plugging filed 11-11-69 19____
Application for plugging approved 11-12-69 19____
Plugging commenced 11-24-69 19____
Plugging completed 12-12-69 19____
Reason for abandonment of well or producing formation _____

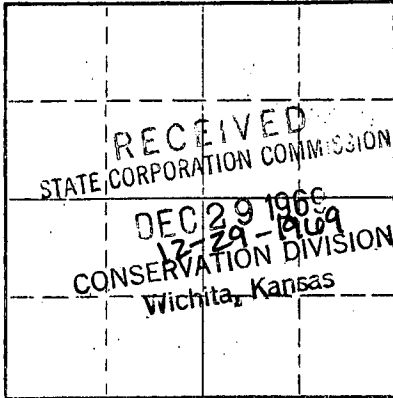

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Leo F. Massey
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3786 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	220	None
				5 1/2	None	823

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Moved unit into location. Dug out cellar. Sanded to 3000' with 5 sacks of cement. Rigged up jacks - 8" tension on 2500 psi.

Shot casing at 1015' and 822'. Pulling casing. Tallied casing. Started to tear down unit.

Allied squeezed well with 3 sacks of hulls - 15 sacks mud - 100 sacks of 50-50 6% pozmix cement.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Forbes Casing Pulling Company, Inc.
Address P. O. Box 221 Great Bend, Kansas

STATE OF Kansas COUNTY OF Barton, ss.
James W. Rockhold (employee of owner) or (owner or operator) of the above-described


well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) James W. Rockhold
P. O. Box 221 Great Bend, Kansas (Address)

Subscribed and sworn to before me this 22 day of December, 19 69

My commission expires May 27, 1973

Notary Public.



WELL LOG BUREAU—KANSAS GEOLOGICAL SOCIETY
508 East Murdock, Wichita, Kansas

Company- I.O. MILLER
Farm- Sutor No. 9

SEC. 14 T. 10 R. 20W
NW SW SE

Total Depth. 3784'
Comm. 9-6-56 Comp. 9-18-56
Shot or Treated.
Contractor, Virginia Drlg. Co. Inc.
Issued. 5-18-57

County Rocks
KANSAS



CASING:
8 5/8" 220'
5 1/2" 3784'

Elevation. 2235 RB

Production. 18 BOPD

Figures indicate Bottom of Formations.

clay-sand shale shells	220
shale shells	360
shale	795
sand shale	1185
shale	1665
anhydrite	1705
shale shells	1975
shale lime	2250
shale shells	2280
lime brkn	2400
lime	2590
lime-shale	2775
lime	2895
lime-shale	3245
lime	3715
lime-shale	3732
conglomerate	3784
Total Depth	

TOPS:	
Heebner	3456
Tbronto	3478
Lansing	3496
B/Kansas City	3709
Conglomerate	3733
Simps on	3750
Arbuckle	3782

5 1/2" set at 3782
T.D. 3786

RECEIVED
STATE CORPORATION COMMISSION
NOV 12 1969
CONSERVATION DIVISION
Wichita, Kansas