


9

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

WELL PLUGGING RECORD

NORTH

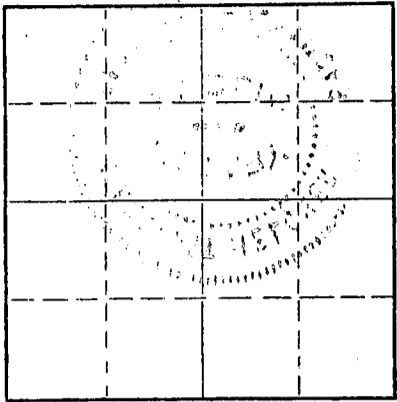

Locate well correctly on above Section Plat

Rooks County, Sec 14 Twp. 10 Rge. 20 (E) W(W)
Location as "NE/CNW/SW" or footage from lines NW/4 SE/4 SE/4
Lease Owner I.O. Miller
Lease Name Sutor Well No. 3
Office Address Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole)
Date well completed 19
Application for plugging filed 19
Application for plugging approved 19
Plugging commenced 5/3/68 19
Plugging completed 5/4/68 19
Reason for abandonment of well or producing formation depleted.

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Massey
Producing formation Depth to top Bottom Total Depth of Well 3769 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	201'	none
				5 1/2"	3765'	505'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.


Checked hole to 3769', ran sand to 3760' and ran 5 sacks of cement. Shot pipe at 727', 601', 510', got loose and pulled 17 joints. Pumped 100 sacks of cement.

PLUGGING COMPLETE.

RECEIVED
STATE CORPORATION COMMISSION
MAY 24 1968
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor KNIGHT CASING PULLING CO., INC.
Address CHASE, KANSAS

STATE OF Kansas, COUNTY OF Rice, ss.
Noel J. Knight (employee of owner) or (owner or operator) of the above-described well, being first duly sworn, deposes and says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.



(Signature) Noel Knight
Chase, Kansas (Address)

Subscribed and sworn to before me this 6 day of May, 19 68

Margaret Melches
Notary Public.

My commission expires February 15, 1971

Well: Sutor #3
 Location: NW/4 SE/4 SE/4 Section 14-10-20w, Rooks Co., Kansas
 Company: I. O. Miller
 Contractor: Virginia Drilling Co., Inc.
 Commenced: April 19, 1952
 Completed: May 9, 1952
 Elevation: 2216 D. F.
 Total Depth: 3762

RECEIVED
 STATE CORPORATION COMMISSION
 5-10-1968
 MAY 10 1968
 CONSERVATION DIVISION
 Wichita, Kansas

FORMATION	DEPTH	
Cellar	0-8	
Sand	8-110	Set 201' of 8-5/8" csg.
Shale-shells	110-725	Set 5 1/2" csg @ 3765'
Sand	725-900	
Sand-lime-shale	900-1420	
Sand	1420-1665	
Anhydrite	1665-1705	
Shale-shells	1705-1895	TOPS:
Salt-shale-shells	1895-2140	
Shale-shells	2140-2540	Kansas City 3472
Lime-shale	2540-3555	Simpson 3733
Lime	3555-3757	Arbuckle 3759
Shale	3757-3759	
Arbuckle	3759-3762	
	T.D. 3769	

Now comes S. A. Murphy, who states that he is familiar with the drilling of oil and gas wells and knows of his own knowledge that the Sutor #3, located in the NW/4 SE/4 SE/4 Section 14-10-20w, Rooks Co., Kansas, was drilled to a total rotary depth of 3762 feet.

S. A. Murphy

Subscribed and sworn to before me this 27th day of May, 1952.

J. M. Newman

My commission expires March 15, 1954.