

15-195-00129-00-00


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 North Market, Insurance Bldg.
Wichita, Kansas

Trego County. Sec. 28 Twp. 12 Rge. (E) 21 (W)
Location as "NE/CNW&SWK" or footage from lines NW/4 NW/4 SW/4
Lease Owner Davis Brothers.
Lease Name Davis Bros-Ridgeway Well No. 1
Office Address 14 East 3rd St., Tulsa 3, Oklahoma.
Character of Well (completed as Oil, Gas or Dry Hole) _____
Date well completed _____ 19____
Application for plugging filed _____ 19____
Application for plugging approved _____ 19____
Plugging commenced March 17 19 61
Plugging completed March 25 19 61
Reason for abandonment of well or producing formation _____

NORTH

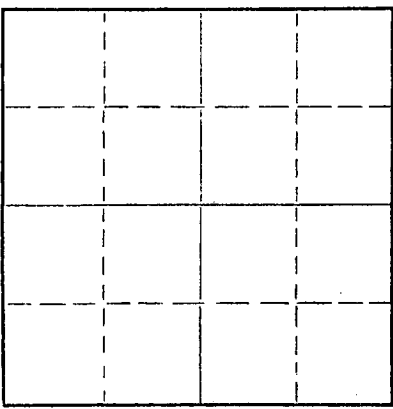

Locate well correctly on above
Section Plat

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? YES.

Name of Conservation Agent who supervised plugging of this well Gilbert Leiker
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3948 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from 3948 feet to XXXX feet for each plug set. surface.
Well had been plugged back with cement plug from 3948 to 3890, and perforated and 3856 to 3861 ft. Hole filled with sand to 3845; four sacks of cement placed on bottom of hole with dump bailer. Pipe shot off at 3241 ft, and pulled from hole, Halliburton pumped down 25 sacks of mud and 75 sacks of cement, forming cement plug to bottom of hole. Plugging complete.

RECEIVED
STATE CORPORATION COMMISSION
MAR 29 1961
03-29-1961
CONSERVATION DIVISION
Wichita, Kansas


(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Barnes and Sons Pipe Pulling Co., Russell, Kans.
Address _____

STATE OF OKLAHOMA, COUNTY OF Tulsa, ss.
Ralph A. Hockenson (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Ralph A. Hockenson
14-East 3rd Street, Tulsa, Okla.
(Address)

SUBSCRIBED AND SWORN to before me this 28 day of March, 19 61
Walter G. Fisher
Notary Public.

My commission expires Nov. 18, 1963



ELLIOTT DAVIS
GEOLOGIST

15-59-60129-00-00 INVESTMENTS LEON DAVIS

Davis Bros.

OIL PRODUCERS
14 EAST 3RD
PHONE LU 4-2471
TULSA, OKLAHOMA

March 28, 1961

WELL LOG

DAVIS BROS.
Ridgway No. 1
NW NW SW Section 28 T-12S R-21W
Trego County, Kansas

RECEIVED
STATE CORPORATION COMMISSION
MAR 29 1961
03-29-1961
CONSERVATION DIVISION
Wichita, Kansas

FORMATION TOPS

Topeka	3295'
Heebner	3500'
Toronto	3522'
Lansing	3536'
Buse KC	3780'
Marmaton	3856'
Conglomerate	3895'
Arbuckle	3932'
Rotary TD	3948'

DAVIS BROS.

By: *Ralph A. Hockenson*
Ralph A. Hockenson
Manager of Production

RAH:lmg