

STATE OF KANSAS  
STATE CORPORATION COMMISSION  
130 S. Market, Room 2078  
Wichita, KS 67202

RECEIVED  
SEP 15 2003  
KCC WICHITA

WELL PLUGGING RECORD  
K.A.R. -82-3-117

15-163-03051-00-01

API NUMBER 6/3/1949  
LEASE NAME Benoit B SWD  
WELL NUMBER #1  
4950 FSL Ft. from S Section Line  
4959 FEL Ft. from E Section Line  
Sec. 25 TWP 9S RGE 19W E or (W)  
County Rooks  
Date Well Completed 6/3/49  
Plugging Commenced 8/1/03  
Plugging Completed 8/5/03

NOTICE: Fill out completely and return to  
Coms. Div. office within 30 days.

LEASE OPERATOR Corsair Energy, LC  
ADDRESS 914 E. Douglas Ave., Wichita KS 67202  
PHONE # 316-267-7779  
Character of Well SWD

(Oil, Gas, D&A, SWD, Input, Water Supply Well)  
The plugging proposal was approved on 8/5/03 (date)  
by Dennis Hamel (KCC District Agent's Name).

Is ACO-1 filed? NO If not, is well log attached? No Logs run  
Producing Formation SWD Depth to Top 3500' Bottom TD 3564"

Show depth and thickness of all water, oil and gas formations.

OIL, GAS, OR WATER RECORDS		CASING RECORD				
Formation	Content	From	To	Size	Put in	Pulled out
Heeb	3289					
Tor	3308	Surface	265'	8 5/8"	265'	0
Lans	3327	Surface	3569	5 1/2"	3564'	0
Arbuckle	3564					

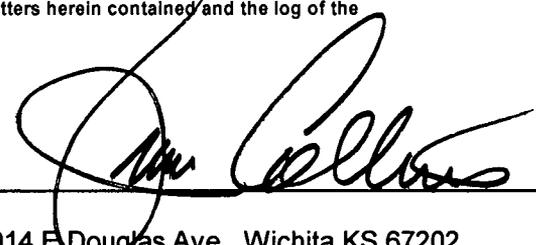
Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_ feet to \_\_\_ feet each set.

Perforated @ 896'  
130 sks @ 900' circulated cement 60/40 poz 10% gel.  
Tied on to backside pumped 25 sks pressured to 500#. (60/40 poz 10% gel)  
Tied on to 5 1/2 mixed 180 sks 65 sks w/ 400# hulls, squeeze max press 1000# shut-in 600#.

Name of Plugging Contractor Plains, Inc. License No. 4072  
Address Box 346 Ness City, KS 67560

NAME OF PARTY RESPONSIBLE FOR PLUGGING FEES: Corsair Energy, LC  
STATE OF Kansas COUNTY OF Sedgwick, ss.

James G. Collins (Employee of Operator) or (Operator) of above-described well  
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the  
above-described well as filed the same are true and correct, so help me God.

(Signature)   
(Address) 914 E. Douglas Ave., Wichita KS 67202

SUBSCRIBED AND SWORN TO BEFORE ME THIS 12th day of September 2003

Virginia Lee Smith  
Notary Public

My Commission Expires: August 25, 2004

