


STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

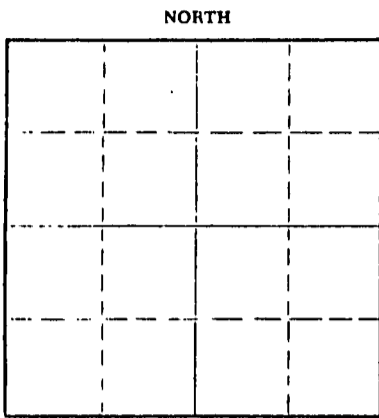

Locate well correctly on above
Section Plot

Ellis County, Sec. 6 Twp. 12S Rge. (E) 20 (W)
Location as "NE/CNW&SW¼" or footage from lines C N/2 N/2 NE/4
Lease Owner Chief Drilling Co., Inc.
Lease Name ARMBRUSTER Well No. 1
Office Address Box 797 - Gt. Bend, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed 5/18 1965
Application for plugging filed 5/18 1965
Application for plugging approved 5/18 1965
Plugging commenced 5/18 1965
Plugging completed 5/18 1965
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Eldon Petty - Hays, Kansas
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3885 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
		0	204	8-5/8"	204	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Wooden plug set @ 660'
Mixed 20 sacks cement through drill pipe
Wooden plug set @ 200'
Mixed 20 sacks cement through drill pipe
Hulls and wooden plug set @ 40'
Mixed 10 sacks cement through drill pipe

RECEIVED
STATE CORPORATION COMMISSION
5-25-1965
MAY 25 1965

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Chief Drilling Co., Inc.
Address Box 797 - Gt. Bend, Kansas

STATE OF KANSAS, COUNTY OF BARTON, ss.
V. Richard Hoover, President (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God. CHIEF DRILLING CO., INC.

(Signature) *V. Richard Hoover*
Box 797 - Gt. Bend, Kansas
(Address)

SUBSCRIBED AND SWORN to before me this 20th day of May, 1965

My commission expires Jan. 26, 1967
Carmen R. Cook, Notary Public.

WELL LOG

Chief Drilling Co., Inc.
 Box 797
 Great Bend, Kansas

ARMBRUSTER #1
 C N/2 N/2 NE/4 Sec. 6-12S-20W
 Ellis County, Kansas

Contractor: Chief Drilling Co., Inc.

Commenced: 5-10-65
 Completed: 5-18-65

Casing Record: 8-5/8" @ 204' w/150 sacks HA-5

DRY & ABANDONED

FORMATION	FROM	TO	ELEVATION	
			2199 Gr.	2201 D.F.
Surface Sand	0	204	2204 K.B.	
Shale & Sand	204	1390		
Shale & Red Bed	1390	1621		
Anhydrite	1621	1671		
Shale	1671	1710		
Shale & Shells	1710	2080		
Shale & Lime	2080	2528		
Lime	2528	2685		
Lime & Shale	2685	3257		
Lime	3257	3479		
Shale & Lime	3479	3545		
Lime	3545	3754		
Lime & Shale	3754	3794		
Conglomerate	3794	3830		
Dolomite	3830	3885		
Total Depth	3885			

FORMATION TOPS	
Anhydrite	1621 + 583
Topeka	3257 -1053
Heebner	3479 -1275
Toronto	3500 -1296
Lansing	3516 -1312
Base Kansas City	3754 -1550
Conglomerate	3794 -1590
Arbuckle	3830 -1626
Total Depth	3885 -1681

STATE OF KANSAS, COUNTY OF BARTON) SS

I hereby certify that the above is a true and correct copy of the Driller's Log of the well drilled in the C N/2 N/2 NE/4 of Section 6-12S-20W, Ellis County, Kansas, to the best of my knowledge and belief.

CHIEF DRILLING CO., INC.

V. Richard Hoover
 V. Richard Hoover, President

Subscribed and sworn to before me this 24th day of May, 1965.

Carmen R. Cook
 Carmen R. Cook, Notary

RECEIVED
 PUBLIC CORPORATION COMMISSION
 5-25-1965
 MAY 25 1965

My commission expires: Jan. 26, 1967.

CONSERVATION DIVISION
 Wichita, Kansas