

GP


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

Trego County. Sec. 34 Twp. 12S Rge. (E) 21 (W)

Location as "NE/CNW/SW" or footage from lines. NE NE NW
Lease Owner Braden-Deem, Inc.
Lease Name Merrill Well No. 1
Office Address 200 E. First, Wichita, Kansas 67202
Character of Well (completed as Oil, Gas or Dry Hole) Oil
Date well completed July 29 19 63
Application for plugging filed December 8 19 71
Application for plugging approved December 9 19 71
Plugging commenced January 12 19 72
Plugging completed January 12 19 72
Reason for abandonment of well or producing formation Pipe bad

NORTH

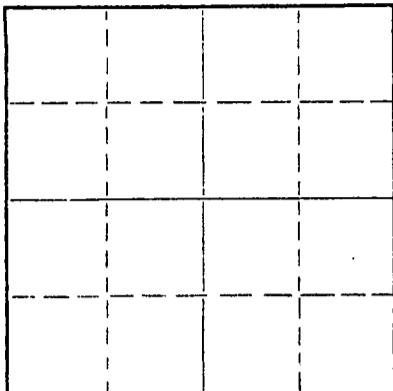

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well W. C. Nichols
Producing formation Arbuckle Depth to top 3861 Bottom 3883 Total Depth of Well 3889 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				4 1/2"	3883	1006'
				8-5/8"	234	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Squeezed hole with 28 sks gel, 2 sacks cotton seed hulls and 100 sacks Pozmix cement with 6% gel. Pumped down 8' 5/8" surface casing - Allied Cementing

Cut off 8-5/8" and level location.

RECEIVED
STATE CORPORATION COMMISSION
JAN 18 1972
CONSERVATION DIVISION
Wichita, Kansas
01-18-1972

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Braden-Deem, Inc.
Address 200 E. First, Wichita, Kansas 67202

STATE OF Kansas, COUNTY OF Sedgwick, ss.
Doy C. Deem (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature)
200 E. First, Wichita, Kansas 67202
(Address)

SUBSCRIBED AND SWORN TO before me this 17 day of January, 19 72

My commission expires March 21, 1974

Notary Public.

15-195-00479-00-00

WELL LOG BUREAU—KANSAS GEOLOGICAL SOCIETY
508 East Murdock, Wichita, Kansas

COPY


GP

Company. MAYFIELD-SMITH DRILLING, INC.
Farm. Merrill No. 1

SEC. 34 T. 12 R. 21 W
NE NE NW

Total Depth. 3083'
Comm. 7-17-63 Comp. 7-29-63
Shot or Treated.
Contractor. Mayfield-Smith Drig.
Issued. 12-7-63

County Trego KANSAS



Elevation. 2217' KB

Production. 25 BOPD-NW

CASING:

8 5/8" 234' cem w/ 135 sx
5" 3883'

Figures indicate Bottom of Formations.

post rock	60
shale	1080
sand	1280
red bed & shale	1560
anhydrite	1608
shale & shells	1900
shale & lime	3335
lime	3810
cherty conglomerate	3828
conglomerate & shale	3861
arbuckle lime	3883 RTD
Total Depth	

TOPS: SMP	
Anhydrite	1560
Heebner	3466
Lansing- Kansas City	3502
Base Kansas City	3738
Cherty Conglomerate	3799
Arbuckle	3861

RECEIVED
STATE CORPORATION COMMISSION
DEC 9 1971
CONSERVATION DIVISION
Wichita, Kansas
12-09-1971