


WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
211 No. Broadway  
Wichita, Kansas

Trego County, Sec. 34 Twp. 12 Rge. 21W (E) (W)

Location as "NE/CNW/SW" or footage from lines NW NE NW  
Lease Owner W. R. Gross and Dunne-Gardner Petroleum, Inc.  
Lease Name Merrill Well No. 2  
Office Address 300 Schweiter Building, Wichita, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole  
Date well completed April 8 19 66  
Application for plugging filed April 8 19 66  
Application for plugging approved April 8 19 66  
Plugging commenced April 8 19 66  
Plugging completed April 8 19 66  
Reason for abandonment of well or producing formation \_\_\_\_\_

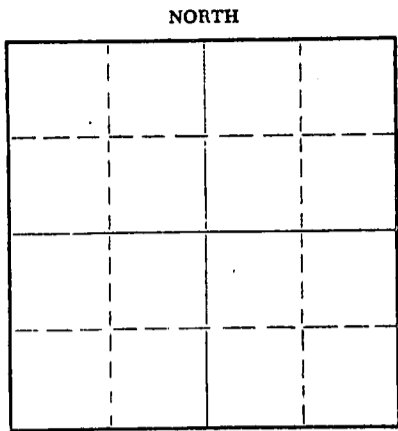

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production \_\_\_\_\_ 19\_\_\_\_  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well W. L. Nichols  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 3995 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Surface Pipe		0	100'	13-3/8"	3-30-66	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Filled hole with mud to 550', set plug with 1/4 sack hulls, 20 sacks cement. Mud to 110', set plug with 1/4 sack hulls, 50 sacks cement. Mud to 40', set plug with 1/4 sack hulls, 25 sacks cement.

RECEIVED  
STATE CORPORATION COMMISSION  
APR 18 1966  
04-18-1966  
CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor \_\_\_\_\_  
Address \_\_\_\_\_

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.  
Don Gardner (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) [Signature]  
300 Schweiter Building, Wichita, Kansas  
(Address)

SUBSCRIBED AND SWORN TO before me this 8th day of April, 19 66

My commission expires March 1, 1970

[Signature]  
Notary Public.

15-195-30128-00-00

DRILLER'S LOG

OPERATOR: Dunne-Gardner Petroleum, Inc. and W. R. Gross  
CONTRACTOR: Dunne-Gardner Petroleum, Inc.,  
300 Schweiter Building, Wichita, Kansas  
LEASE: MERRILL  
WELL: No. 2  
LOCATION: NW NE NW Sec. 34-12S-21W  
Trego County, Kansas  
DATE COMMENCED: March 30, 1966  
DATE COMPLETED: April 8, 1966  
CASING: Set 100' of 13-5/8" surface pipe w/175 sacks HA-5

<u>FROM</u>	<u>TO</u>	
0	78	Clay and Shale
78	350	Shale
350	775	Shale and Shells
775	1075	Shale and Sand
1075	1340	Sand
1340	1616	Shale
1616	1667	Anhydrite
1667	2287	Shale
2287	3543	Lime and Shale
3543	3615	Cherty Lime
3615	3671	Cherty Lime and Shale
3671	3746	Lime
3746	3830	Lime and Shale
3830	3864	Cherty Lime and Shale
3864	3890	Lime and Chert
3890	3907	Shale
3907	3920	Lime and Chert
3920	3995	Lime
3995		Total Depth

RECEIVED  
STATE CORPORATION COMMISSION  
APR 20 1966  
11:20 - 1966  
CONSERVATION DIVISION  
Wichita, Kansas


I certify the above to be true and correct to the best of my knowledge and belief.

DUNNE-GARDNER PETROLEUM, INC.

By

  
Don Gardner

Subscribed and sworn to before me this 19th day of April, 1966.

  
Marilyn E. Fox, Notary Public

My Commission Expires:  
November 9, 1969