

15-195-30129-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION


Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas 67202

WELL PLUGGING RECORD

Trego County, Sec. 34 Twp. 12 Rge. 21 (E) (W) X

Location as "NE/CNWSW" or footage from lines _____
Lease Owner Braden-Deem, Inc.
Lease Name Merrill Well No. 1
Office Address Suite 520, 200 E. First Wichita, Kansas 67202
Character of Well (completed as Oil, Gas or Dry Hole) _____
Date well completed _____ 19____
Application for plugging filed _____ 19____
Application for plugging approved _____ 19____
Plugging commenced 12-23-71 _____ 19____
Plugging completed 12-30-71 _____ 19____
Reason for abandonment of well or producing formation Depleted

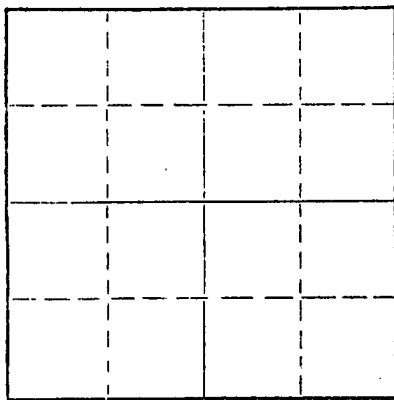

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well W. L. Nichols
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3909 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				10 3/4	112	None
				7	1660	None
				5 1/2	3898	3227.12'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Measured T.D. at 3880'. Dumped 40 ft. sand and 5 sacks cement on bottom. Shot casing at 3500, 3400, 3300, and 3210 ft. Pulled a total of 111 jts. of 5 1/2" casing. Pushed a plug to 900 ft. and built a 20 ft. rock bridge. Dumped 3 yards readymix concrete and mudded hole to 250'. Built a 20' rock bridge and dumped 2 yards readymix concrete to surface.


RECEIVED
STATE CORPORATION COMMISSION
JAN 4 1972
CONSERVATION DIVISION
Wichita, Kansas
01-04-1972

Name of Plugging Contractor Rockhold Engineering, Inc.
Address Box 698 Great Bend, Kansas 67530

STATE OF Kansas, COUNTY OF Barton, ss.
James W. Rockhold (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) James W. Rockhold James W. Rockhold
Box 698 Great Bend, Kansas 67530
(Address)



AND SWORN TO before me this 31st day of December, 1971
Cathy Miller
Cathy Miller Notary Public.
My commission expires September 30, 1975

15-195-30129-00-00

DRILLER'S LOG

OPERATOR: Dunne-Gardner Petroleum, Inc. and
W. R. Gross

CONTRACTOR: Dunne-Gardner Petroleum, Inc.
300 Schweiter Building, Wichita, Kansas

LEASE: Merrill

WELL: No. 1

LOCATION: S/2 NE NW Section 34-12S-21W,
Trego County, Kansas

DATE COMMENCED: December 3, 1965

DATE COMPLETED: December 13, 1965

CASING: Set 8-5/8" surface pipe @ 112' w/120 sacks cement;
Ran 7" casing @ 1650' w/400 sacks cement;
Ran 5 1/2" casing @ 3898 w/75 sacks cement.

<u>FROM</u>	<u>TO</u>	
0	60	Clay and Rock
60	111	Shale
111	574	Shale and Red Bed
574	930	Shale and Shells
930	960	Sand
960	1120	Gray Shale and Red Bed
1120	1340	Sand
1340	1470	Red Bed and Shale
1470	1623	Shale
1623	1675	Anhydrite
1675	1900	Shale and Shells
1900	3010	Shale and Lime
3010	3180	Lime
3180	3320	Lime and Shale
3320	3567	Lime
3567	3625	Cherty Lime
3625	3680	Lime and Chert
3680	3855	Lime
3855	3874	Chert
3874	3903	Cherty Lime
3903	3909	Lime
3909		Rotary Total Depth

RECEIVED
STATE CORPORATION COMMISSION
DEC 9 1971
CONSERVATION DIVISION
Wichita, Kansas
12-09-1971

I certify the above to be true and correct to the best of my knowledge and belief.


DUNNE-GARDNER PETROLEUM, INC.

By 
Don Gardner

Subscribed and sworn to before me this 27th day of December, 1965.

My Commission Expires:

November 9, 1969


Marilyn E. Fox