

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-049-20709-00-00
Spot: NENENW Sec/Twnshp/Rge: 35-31S-10E
330 feet from N Section Line, 2310 feet from W Section Line
Lease Name: VEJAL Well #: 1
County: ELK Total Vertical Depth: 2284 feet

Operator License No.: 3591
Op Name: TRIBOULET, ED DBA C & E OIL CO.
Address: RR1 BOX 1B2
MOLINE, KS 67353

String	Size	Depth (ft)	Pulled (ft)	Comment
SURF	8.625	211		
PROD	4.5	2280		

74.23

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: 12/30/2008 8:00 AM
Plug Co. License No.: 3591 Plug Co. Name: TRIBOULET, ED DBA C & E OIL CO.
Proposal Rcvd. from: _____ Company: _____ Phone: _____

Proposed Plugging Method: Perforate Pipe at 1000' and 550'. 50' plug at 1906', 50' plug at 1000' and 550' to surface.

Plugging Proposal Received By: DUANE SIMS Witness Type: NONE
Date/Time Plugging Completed: 12/30/2008 5:00 PM KCC Agent: DUANE SIMS

Actual Plugging Report:

Cast iron bridge plug set at 1908'. Pipe perforated at 1000' and 500'. Ran 2" pipe to 1906' gelled hole and spotted 10 sack plug. Pulled 2" up to 1100' and pumped 100# gell spacer. Pulled 2" up to 1000' and spotted 10 sack plug. Pulled 2' up to 600' and pumped 100# gel spacer. Pulled 2" up to 500' and circulated cement to surface. Pulled 2" and topped well off. A total of 155 sacks of cement were used to plug this well.

Perfs:

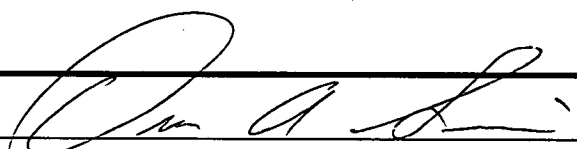
RECEIVED
KCC DISTRICT #3
SEP 22 2009 DAS
CHANUTE, KS

11-06-09
2010060446
RECEIVED
SEP 28 2009
KCC WICHITA

Remarks:

Plugged through: TBG

District: 03

Signed  (TECHNICIAN) 