

15-163-03405-0000


STATE OF KANSAS  
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
800 Bittling Building  
Wichita, Kansas

Rooks County. Sec. 27 Twp. 10 Rge. 20 ~~23~~ (W)  
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines NW NW NW  
Lease Owner The Derby Oil Company  
Lease Name Williams Well No. 1  
Office Address 420 West Douglas, Wichita, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole  
Date well completed June 26, 19 51  
Application for plugging filed June 28, 19 51  
Application for plugging approved June 30, 19 51  
Plugging commenced June 27, 19 51  
Plugging completed June 27, 19 51  
Reason for abandonment of well or producing formation Dry Hole

NORTH



Locate well correctly on above  
Section Plat

If a producing well is abandoned, date of last production - - - 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Eldon Petty  
Producing formation Depth to top Bottom Total Depth of Well 3781 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
				8 5/8"	257'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Filled hole with mud. Set wood plug at 240 feet followed with 15 sacks cement. Filled with mud to 40 feet. Set wood plug at 40 feet, followed by 10 sacks cement to surface.

07-18-51

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to The Derby Oil Company  
Address Box 1030, Wichita, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss.  
F. W. Heiser (employee of owner) of the above-described well,  
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God

(Signature) F. W. Heiser  
Box 1030, Wichita, Kansas (Address)

SUBSCRIBED AND SWORN to before me this 16<sup>TH</sup> day of July, 19 51

H. A. Bilson Notary Public.

My commission expires August 24, 1953


22-7377-8 4-49-10M

PLUGGING  
FILE SEC 27 T 10 R  
BOOK PAGE 91 LINE 86

15-163-03405-0000  
 THE DERBY OIL COMPANY

WELL RECORD  
 PRODUCTION DEPARTMENT

640 Acres  
 N

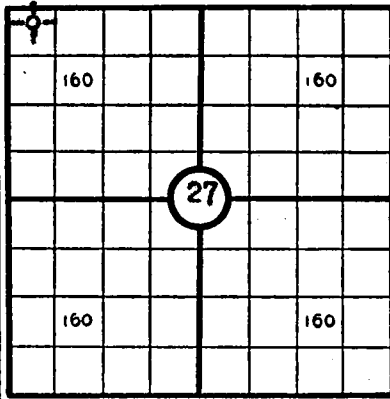

Locate well correctly

LEASE Williams WELL NO. 1

RECORD COMPILED July 16, 19 51 BY E. McNeil

SEC. 27 TWP. 10 RGE. 20W COUNTY Rooks STATE Kans

LOCATION NW NW NW ACRES 160

STAKED BY Roy Eckel DATE \_\_\_\_\_ 19\_\_

ELEVATION GROUND 2153 D. F.: 2159 K. B.: 2161

ALL MEASUREMENTS ARE FROM Kelly Bushing

TOOLS	STARTED	COMPLETED	FROM	TO	CONTRACTOR
ROTARY	6-14-51	6-25-51	0	3781	Champlin Ref. Co.
CABLE	---	---	---	---	---

PRODUCTION DATA Dry and Abandoned

CASING AND TUBING RECORD

SIZE HOLE DRILLED	DEPTH	CASING SIZE	WT.	THDS.	MAKE, TYPE, GRADE, NEW, USED	CASING POINT	PULLED	LEFT IN	CEMENT		REMARKS
									SACKS	ESTIMATED TOP	
12 1/8 IN.	251	8 5/8"	24#			257	---	---	175	Surface	Hallib.

WELL LOG

FORMATION	FROM	TO	NO. OF FEET	DRLG. TIME	FORMATION	FROM	TO	NO. OF FEET	DRLG. TIME
Sand & shale	0	257	257						
Shale, sand & shells	257	1535	1278						
Sand, shale, Anhydrite	1535	1660	125						
Anhydrite & shale	1660	1920	260						
Shale & shells	1920	2730	810						
Shale	2730	2875	145						
Shale & lime	2875	3447	572						
Lime	3447	3666	219						
Shale & lime	3666	3702	36						
Chert & shale	3702	3781	79						
Rotary total depth	3781								

**PLUGGING**  
 FILE SEC 27 T 10 R 20  
 BOOK PAGE 91 LINE 86





