

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

15-065-02946-0000
WELL PLUGGING RECORD

Graham County, Sec. 4 Twp. 10 Rge. 21 (E) (W)

Location as "NE/CNW%SW%" or footage from lines SW SW NE

Lease Owner Okmar Oil Company

Lease Name Long Well No. #1

Office Address 820 Union National Bldg. Wichita 2, Kansas

Character of Well (completed as Oil, Gas or Dry Hole)

Date well completed 19

Application for plugging filed 19

Application for plugging approved 19


Plugging commenced 8-3-62 19

Plugging completed 8-8-62 19

Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced?

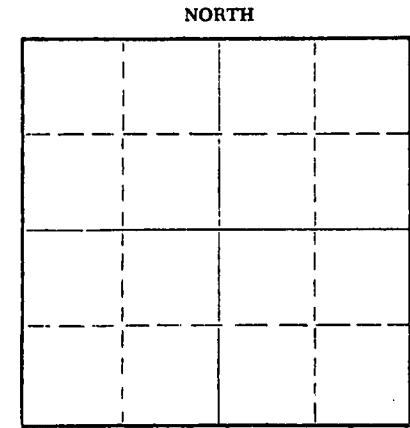

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Eldon Petty

Producing formation Depth to top Bottom Total Depth of Well 3873 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Sanded back and dumped 4 sacks cement with dump baler
Pulled 11 joints. Mixed and pumped 25 sacks of mud, pulled 3 joints, pumped 8 sacks mud, pulled 2 joints started to pump pulled 2 joints, pumped 9 sacks of mud, pumped 20 sacks of cement, pulled 9 joints. Mudded hole to 30' dumped 10 sacks of cement on top.

RECEIVED
STATE CORPORATION COMMISSION
AUG 14 1962
CONSERVATION DIVISION
Wichita, Kansas

08-14-62

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Southwest Casing Pulling Co., Inc.

Address Box 364, Great Bend, Kansas

STATE OF Kansas, COUNTY OF Barton, ss.

Southwest Casing Pulling Co., Inc. (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) W. C. Spencer Sec.

Box 364, Great Bend, Kansas (Address)

SUBSCRIBED AND SWORN TO before me this 13 day of August, 1962

My commission expires 24 October 1964

Sidney D. Miller Notary Public.



LONG #1

LOCATION: SW $\frac{1}{4}$ SW $\frac{1}{4}$ NE $\frac{1}{4}$ Sec. 4-10-21W
Graham County, Kansas

OPERATOR: Heathman Drilling Co., Inc.

CONTRACTOR: Birmingham-Bartlett Drilling Co.

SURFACE CASING: Ran 6 jts., 137.67' 8-5/8" casing cemented @ 134' with 125 sacks bulk cement and 1 c.c.

OIL STRING: Ran 126 jts., 3876.46' 5 $\frac{1}{2}$ " O.D. 1 $\frac{1}{4}$ " casing cemented @ 3871.50' with 75 sacks cement.

SPUDDED: 7-11-50
COMPLETED: 7-21-50

ELEVATION: 2299 KB

GEOLOGICAL TOPS (KB)

Topoka	3293 (- 994)
Heebner	3501 (-1202)
Lansing-K.C.	3539 (-1240)
Base K.C.	3766 (-1467)
Maruaton Chert	3821 (-1522)
Simpson shale	3852 (-1553)
Simpson dolomite	3856 to 3858'
Arbuckle (corrected)	3870 (-1571)
Total Depth	3872' corrected

LOG
(Figures indicate bottom of formation)

0	to	30	Surface clay
		65	Sand
		1200	Shale and shells
		1465	Shale, shells and sand
		2620	Shale and shells
		3300	Shale and lime
		3800	Lime
		3868	Conglomerate
		3872	Lime

DRILLING-IN INFORMATION

7-24-50 ran Gamma Ray
7-25-50 drilled plug, made 1' new hole to T.D. 3873'
Filled up 1100' oil in 1 $\frac{1}{2}$ hrs
2000' oil in 6 hrs. no water.
7-26-50 Swabbed 11 boph 500' off bottom for 7 hrs.
Ran tubing and acidized

HEATHMAN DRILLING CO., INC.

The undersigned Richard Hindery of the Birmingham-Bartlett Drilling Co. hereby certifies that the above is a true and correct log of the formations encountered in drilling the Long No. 1 well as shown on the daily drilling reports.

BIRMINGHAM-BARTLETT DRILLING CO.

BY Richard Hindery

Subscribed and sworn before me this 24th day of July, 1950.

Virian F. Tinger
Notary Public

My commission expires November 29, 1950.

CONSERVATION DIVISION
Geological Reports