

15-065-01139-0001


STATE OF KANSAS  
STATE CORPORATION COMMISSION

Form CP-4

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
212 No. Market  
Wichita, Kansas

Graham County. Sec. 4 Twp. 10 Rge. (E) 21 (W)  
Location as "NE/CNWxSWx" or footage from lines. W/2 SE SE  
Lease Owner Okmar Oil Company  
Lease Name Kern Well No. 5  
Office Address 1130 Vickers KSB&T Bldg., Wichita, Kansas 67202  
Character of Well (completed as Oil, Gas or Dry Hole) OIL  
Date well completed July 17 19 54  
Application for plugging filed March 19 19 70  
Application for plugging approved March 20 19 70  
Plugging commenced March 26 19 70  
Plugging completed March 26 19 70  
Reason for abandonment of well or producing formation Uneconomical

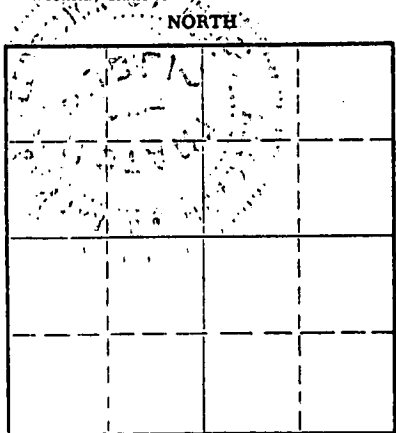

Locate well correctly on above  
Section Plat

If a producing well is abandoned, date of last production August 28 19 69  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Mr. W.L. Nichols, P.O. Box 157, Morland, Kansas  
Producing formation Arbuckle Depth to top 3873 Bottom 3876 Total Depth of Well 3873 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Arbuckle	Oil & Water			8 5/8	118'	0
Arbuckle	Oil & Water	3873	3876	5 1/2	3873'	0


Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Dump frac sand filling from 3876' to 3856' S.L.M. Fill from 3856' to 860' with 14#/gal. Gel mud. Cement from 860' to 8'. Pumped under pressure with last 25 sacks filling 5 1/2" casing and circulating between 5 1/2 and 8 5/8, filling cellar. Fill from 8' to 2' below surface with cement and cut off casing 2' below surface.

RECEIVED  
STATE CORPORATION COMMISSION  
MAY 26 1970  
CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor Okmar Oil Company  
Address Box 723, Hays, Kansas 67601

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.  
Jim Thatcher (employee of owner) or (owner/operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above described well as filed and that the same are true and correct. So help me God.



(Signature) Jim Thatcher  
1130 Vickers KSB&T Bldg., Wichita, Kansas 67202  
(Address)

Subscribed and sworn to before me this 25 day of May, 19 70  
June 17, 1973  
Sandra L. Mendoza Notary Public.  
My commission expires